

ISL85415EVAL1Z Wide V_{IN} 500mA Synchronous Buck Regulator

Description

The ISL85415EVAL1Z kit is intended for use for point-of-load applications sourcing from 3V to 36V. The kit is used to demonstrate the performance of the ISL85415 Wide V_{IN} Low Quiescent Current High Efficiency Sync Buck Regulator with 500mA output current.

The ISL85415 is offered in a 4mmx3mm 12 Ld DFN package with 1mm maximum height. The converter occupies 1.516 cm^2 area.

Key Features

- Wide input voltage range 3V to 36V
- Synchronous operation for high efficiency
- No compensation required
- Integrated high-side and low-side NMOS devices
- Selectable PFM or forced PWM mode at light loads
- Internal fixed (500kHz) or adjustable switching frequency 300kHz to 2MHz
- Continuous output current up to 500mA
- Internal or external soft-start
- Minimal external components required
- Power-good and enable functions available

Recommended Equipment

The following materials are recommended to perform testing:

- 0V to 50V Power Supply with at least 2A source current capability
- Electronic loads capable of sinking current up to 1.5A
- Digital multimeters (DMMs)
- 100MHz quad-trace oscilloscope
- Signal generator

Quick Setup Guide

1. Ensure that the circuit is correctly connected to the supply and loads prior to applying any power.
2. Connect the bias supply to V_{IN} , the plus terminal to V_{IN} (P4) and the negative return to GND (P5).
3. Verify that the position is ON for S1.
4. Turn on the power supply.
5. Verify the output voltage is 3.3V for V_{OUT} .

Evaluating the Other Output Voltage

The ISL85415EVAL1Z kit output is preset to 3.3V; however, output voltages can be adjusted from 0.6V to 15V. The output voltage programming resistor, R_2 , will depend on the desired output voltage of the regulator and the value of the feedback resistor R_1 , as shown in [Equation 1](#).

$$R_2 = R_1 \left(\frac{0.6}{V_{OUT} - 0.6} \right) \quad (EQ. 1)$$

If the output voltage desired is 0.6V, then R_1 is shorted. Please note that if V_{OUT} is less than 1.8V, the switching frequency and compensation must be changed for 300kHz operation due to minimum on-time limitation. Please refer to datasheet [ISL85415](#) for further information.

[Table 1](#) on [page 2](#) shows the component selection that should be used for the respective V_{OUT} s.



FIGURE 1. FRONT OF EVALUATION BOARD ISL85415EVAL1Z



FIGURE 2. BACK OF EVALUATION BOARD ISL85415EVAL1Z

Application Note 1859

TABLE 1. EXTERNAL COMPONENT SELECTION

| V _{OUT} (V) | L ₁ (μH) | C _{OUT} (μF) | R ₁ (kΩ) | R ₂ (kΩ) | C _{FB} (pF) | R _{FS} (kΩ) | R _{COMP} (kΩ) | C _{COMP} (pF) |
|----------------------|---------------------|-----------------------|---------------------|---------------------|----------------------|----------------------|------------------------|------------------------|
| 12 | 45 | 10 | 90.9 | 4.75 | 22 | 115 | 100 | 470 |
| 5 | 22 | 2x22 | 90.9 | 12.4 | 100 | 120 | 100 | 470 |
| 3.3 | 22 | 2x22 | 90.9 | 20 | 100 | 120 | 100 | 470 |
| 2.5 | 22 | 2x22 | 90.9 | 28.7 | 100 | 120 | 100 | 470 |
| 1.8 | 22 | 22 | 100 | 50 | 22 | 120 | 50 | 470 |

Frequency Control

The ISL85415 has a FS pin that controls the frequency of operation. Programmable frequency allows for optimization between efficiency and external component size. It also allows low frequency operation for low V_{OUTS} when minimum on time would limit the operation otherwise. Default switching frequency is 500kHz when FS is tied to V_{CC} (R₁₀ = 0). By removing R₁₀ the switching frequency could be changed from 300kHz (R₁₂ = 340k) to 2MHz (R₁₂ = 32.4k). Please refer to datasheet [ISL85415](#) for calculating the value of R₁₀. Do not leave this pin floating.

Disabling/Enabling Function

The ISL85415 evaluation board contains S1 switch that enables or disables the part, thus allowing low quiescent current state. [Table 2](#) details this function.

TABLE 2. SWITCH SETTINGS

| S1 | ON/OFF CONTROL |
|-----|--------------------------|
| ON | Enable V _{OUT} |
| OFF | Disable V _{OUT} |


SYNC Control

The ISL85415 evaluation board has a SYNC pin that allows external synchronization frequency to be applied. Default board configuration has R₆ = 200k to V_{CC}, which defaults to PWM operation mode and also to the pre-selected switching frequency set by R₁₂ (see [ISL85415](#) datasheet and previous section “[Frequency Control](#)” for details). If this pin is tied to GND the IC will operate in PFM mode. S2 switch allows to force the PFM or PWM modes.

Soft-Start /COMP Control

R₁₅ selects between internal (R₁₅ = 0) and external soft-start. R₁₁ selects between internal (R₁₁ = 0) and external compensation. Please refer to Pin Description Table of the [ISL85415](#) datasheet.

ISL85415EVAL1Z Schematic

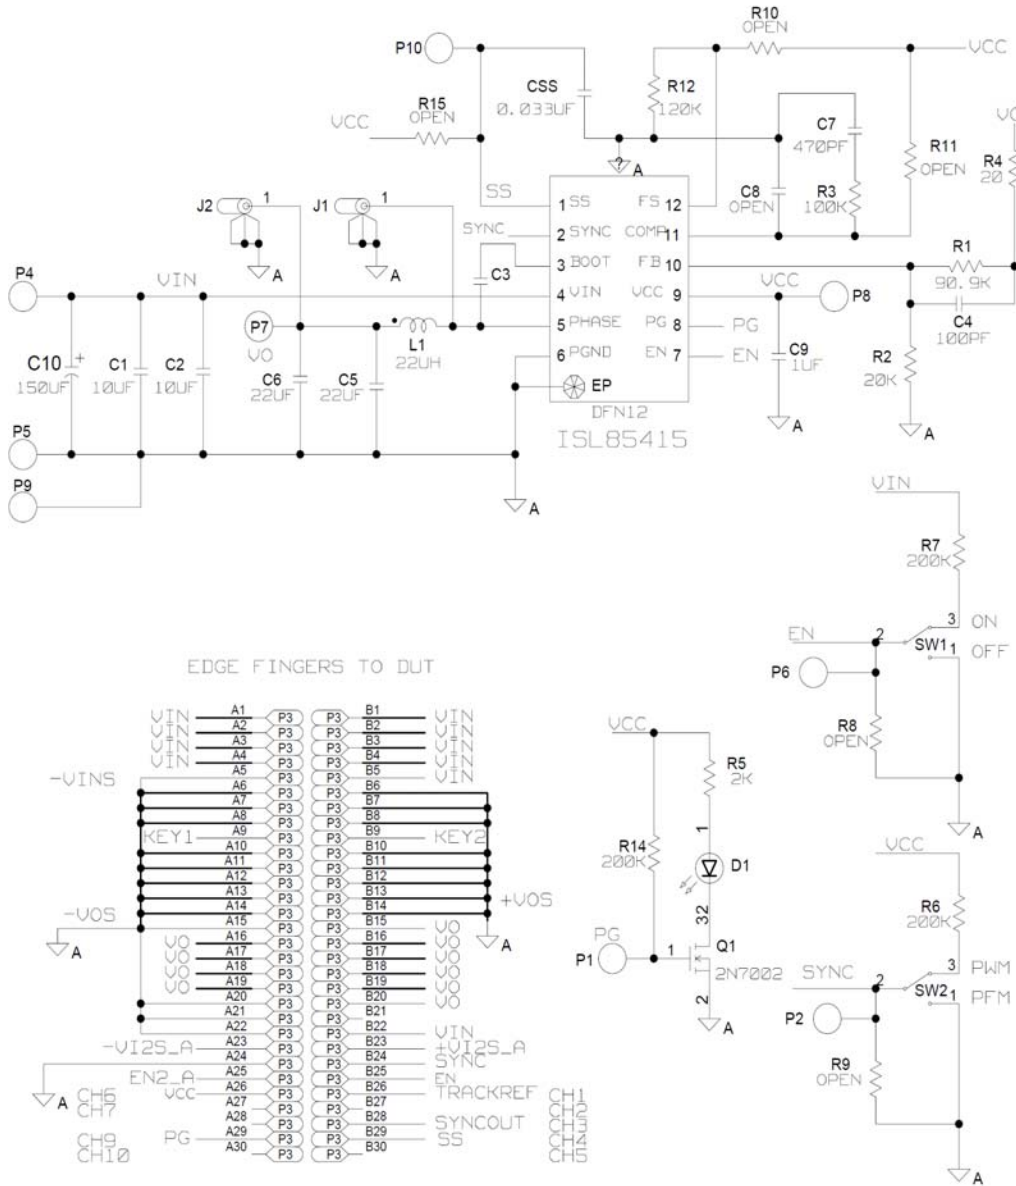

NOTE: The input electrolytic capacitor C10 is optional and it is used to prevent transient voltages when the input test leads have large parasitic inductance. It can be removed if the IC is used in a system application.

Application Note 1859

ISL85415 Bill of Materials

| PART NUMBER | QTY | UNITS | REFERENCE DESIGNATOR | DESCRIPTION | MANUFACTURER | MANUFACTURER PART |
|--------------------------------|-----|-------|------------------------|---|--------------------|-----------------------|
| ISL85400EVAL1ZREVAPCB | 1 | ea | SEE LABEL-RENAME BOARD | PWB-PCB, ISL85400EVAL1Z REVA, ROHS | INTERSIL | ISL85400EVAL1ZREVAPCB |
| EEE-FK1H151P-T | 1 | ea | C10 | CAP, SMD, 10.3mm, 150µF, 50V, 20%, ROHS, ALUM. ELEC. | PANASONIC | EEE-FK1H151P |
| H1045-00101-50V5-T | 1 | ea | C4 | CAP, SMD, 0603, 100pF, 50V, 5%, COG, ROHS | PANASONIC | ECJ-1VC1H101J |
| H1045-00104-50V10-T | 1 | ea | C3 | CAP, SMD, 0603, 0.1µF, 50V, 10%, X7R, ROHS | AVX | 06035C104KAT2A |
| H1045-00105-16V10-T | 1 | ea | C9 | CAP, SMD, 0603, 1µF, 16V, 10%, X5R, ROHS | MURATA | GRM188R61C105KA12D |
| H1045-00333-16V10-T | 1 | ea | CSS | CAP, SMD, 0603, 33000pF, 16V, 10%, X7R, ROHS | VENKEL | C0603X7R160-333KNE |
| H1045-00471-50V5-T | 1 | ea | C7 | CAP, SMD, 0603, 470pF, 50V, 5%, NPO, ROHS | PANASONIC | ECJ-1VC1H471J |
| H1045-DNP | 0 | ea | C8 | CAP, SMD, 0603, DNP-PLACE HOLDER, ROHS | | |
| H1065-00106-50V10-T | 2 | ea | C1, C2 | CAP, SMD, 1206, 10µF, 50V, 10%, X5R, ROHS | TDK | C3216X5R1H106K |
| H1065-00226-6R3V20-T | 2 | ea | C5, C6 | CAP, SMD, 1206, 22µF, 6.3V, 20%, X5R, ROHS | PANASONIC | ECJ-DV50J226M |
| DR73-220-R | 1 | ea | L1 | COIL-PWR INDUCTOR, SMD, 7.6mm, 22µH, 20%, 1.62A, ROHS | COOPER/COILTRONICS | DR73-220-R |
| 131-4353-00 | 2 | ea | J1, J2 | CONN-SCOPE PROBE TEST PT, COMPACT, PCB MNT, ROHS | TEKTRONIX | 131-4353-00 |
| 1514-2 | 4 | ea | P4, P5, P7, P9 | CONN-TURRET, TERMINAL POST, TH, ROHS | KEYSTONE | 1514-2 |
| 5002 | 5 | ea | P1, P2, P6, P8, P10 | CONN-MINI TEST POINT, VERTICAL, WHITE, ROHS | KEYSTONE | 5002 |
| LTST-C190KGKT-T | 1 | ea | D1 | LED, SMD, 0603, GREEN CLEAR, 2V, 20mA, 571nm, 35mcd, ROHS | LITEON/VISHAY | LTST-C190KGKT |
| ISL85415FRZ for ISL85415EVAL1Z | 1 | ea | U1 | IC-500mA BUCK REGULATOR, 12P, DFN, 3X4, ROHS | INTERSIL | ISL85415FRZ |
| 2N7002LT1G-T | 1 | ea | Q1 | TRANSISTOR-MOS, N-CHANNEL, SMD, SOT23, 60V, 115mA, ROHS | ON SEMICONDUCTOR | 2N7002LT1G |
| H2511-00200-1/10W1-T | 1 | ea | R4 | RES, SMD, 0603, 20Ω, 1/10W, 1%, TF, ROHS | PANASONIC | ERJ-3EKF20R0V |

Application Note 1859

ISL85415 Bill of Materials (Continued)

| PART NUMBER | QTY | UNITS | REFERENCE DESIGNATOR | DESCRIPTION | MANUFACTURER | MANUFACTURER PART |
|----------------------|-----|-------|-------------------------------|--|-----------------------------|--------------------|
| H2511-00R00-1/10W-T | 1 | ea | R15 | RES, SMD, 0603, 0 Ω , 1/10W, TF, ROHS | VENKEL | CR0603-10W-000T |
| H2511-01003-1/10W1-T | 1 | ea | R3 | RES, SMD, 0603, 100k, 1/10W, 1%, TF, ROHS | VENKEL | CR0603-10W-1003FT |
| H2511-01203-1/10W1-T | 1 | ea | R12 | RES, SMD, 0603, 120k, 1/10W, 1%, TF, ROHS | VISHAY/DALE | CRCW0603120KFKEA |
| H2511-02001-1/10W1-T | 1 | ea | R5 | RES, SMD, 0603, 2k, 1/10W, 1%, TF, ROHS | KOA | RK73H1JTDD2001F |
| H2511-02002-1/10W1-T | 1 | ea | R2 | RES, SMD, 0603, 20k, 1/10W, 1%, TF, ROHS | VENKEL | CR0603-10W-2002FT |
| H2511-02003-1/10W1-T | 2 | ea | R6, R7 | RES, SMD, 0603, 200k, 1/10W, 1%, TF, ROHS | VENKEL | CR0603-10W-2003FT |
| H2511-09092-1/10W1-T | 1 | ea | R1 | RES, SMD, 0603, 90.9k, 1/10W, 1%, TF, ROHS | PANASONIC | ERJ-3EKF9092V |
| H2511-DNP | 0 | ea | R8-R11, R14 | RES, SMD, 0603, DNP-PLACE HOLDER, ROHS | | |
| GT11MSCBE-T | 2 | ea | SW1, SW2 | SWITCH-TOGGLE, SMD, 6PIN, SPDT, 2POS, ON-ON, ROHS | ITT INDUSTRIES/C&K DIVISION | GT11MSCBE |
| 5X8-STATIC-BAG | 1 | ea | PLACE ASSY IN BAG | BAG, STATIC, 5X8, ZIPLOC, ROHS | INTERSIL | 212403-013 |
| DNP | 0 | ea | P3 (3VH30/1JN5) | DO NOT POPULATE OR PURCHASE | | |
| LABEL-DATE CODE | 1 | ea | | LABEL-DATE CODE_BOM REV#_SERIAL# LABEL ON ZIL & QUEL | INTERSIL | LABEL-DATE CODE |
| LABEL-RENAME BOARD | 1 | ea | RENAME PCB TO: ISL85415EVAL1Z | LABEL, TO RENAME BOARD | INTERSIL | LABEL-RENAME BOARD |

ISL85415EVAL1Z Board Layout

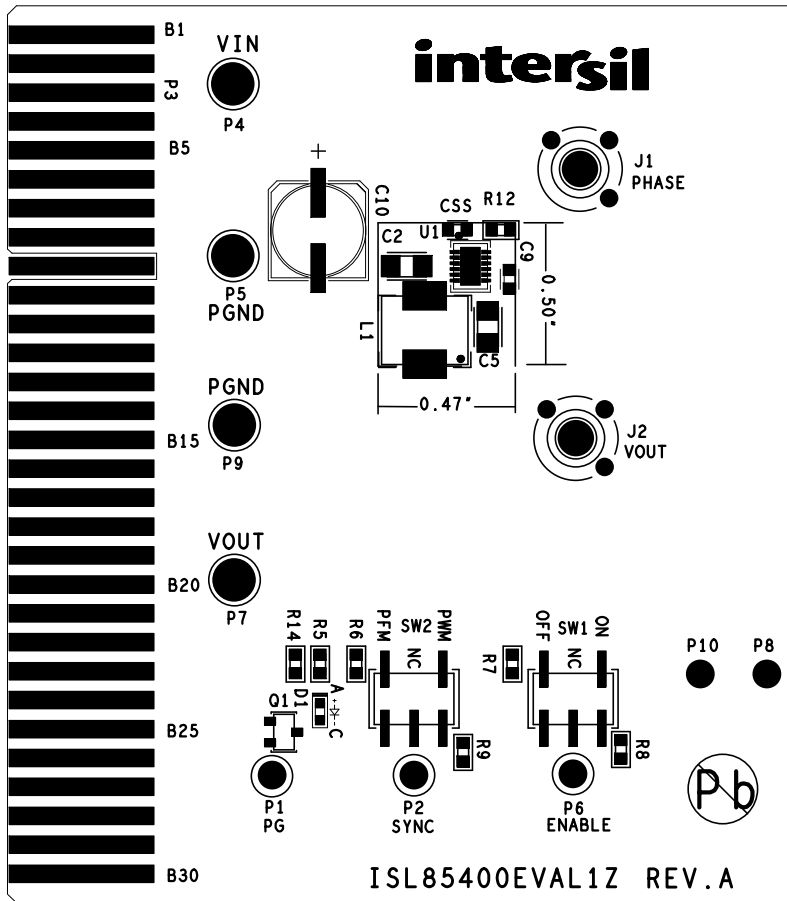


FIGURE 3. SILK SCREEN TOP

ISL85415EVAL1Z Board Layout (Continued)

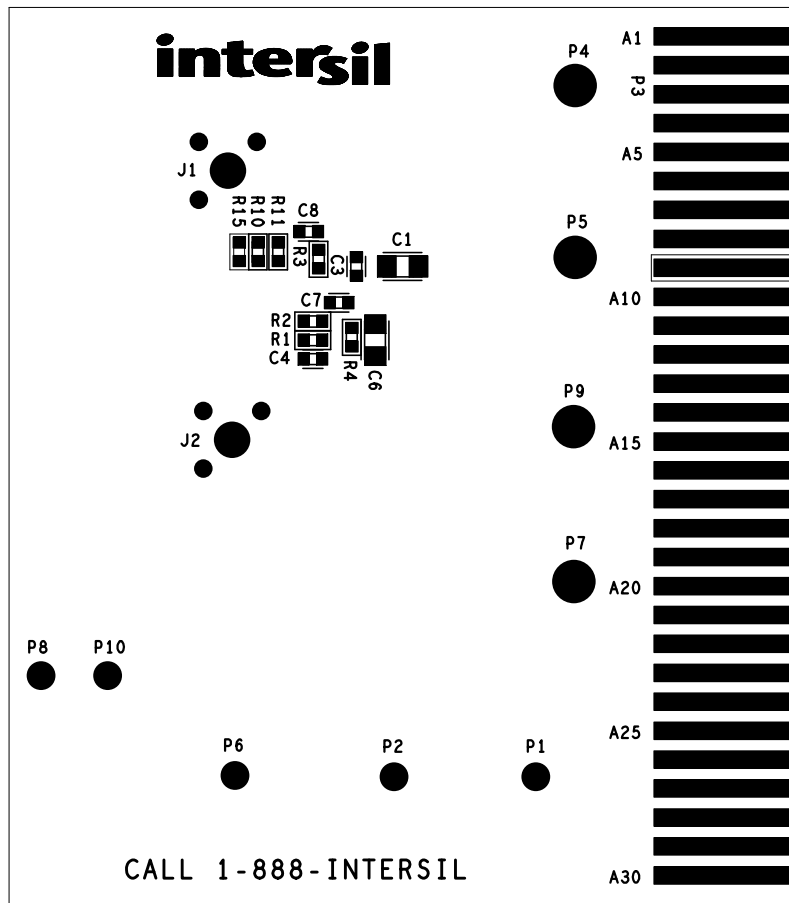


FIGURE 4. SILKSCREEN BOTTOM

Efficiency Curves $F_{SW} = 800kHz, T_A = +25^\circ C$

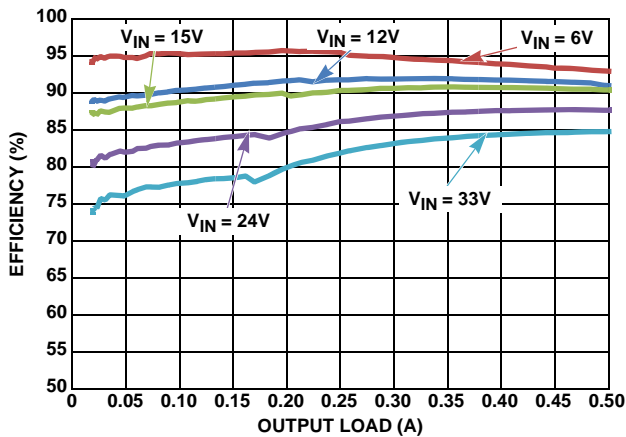


FIGURE 5. EFFICIENCY vs LOAD, PFM, $V_{OUT} = 5V$

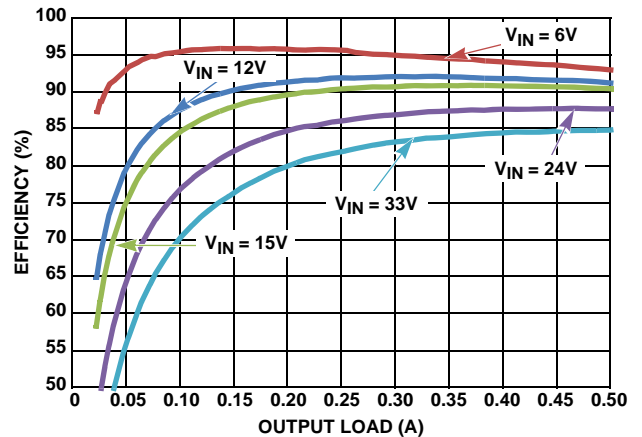


FIGURE 6. EFFICIENCY vs LOAD, PWM, $V_{OUT} = 5V$

Efficiency Curves $F_{SW} = 800kHz, T_A = +25^\circ C$ (Continued)

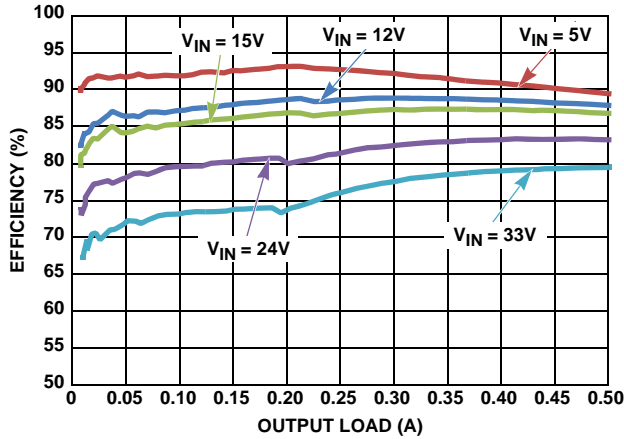


FIGURE 7. EFFICIENCY vs LOAD, PFM, $V_{OUT} = 3.3V$

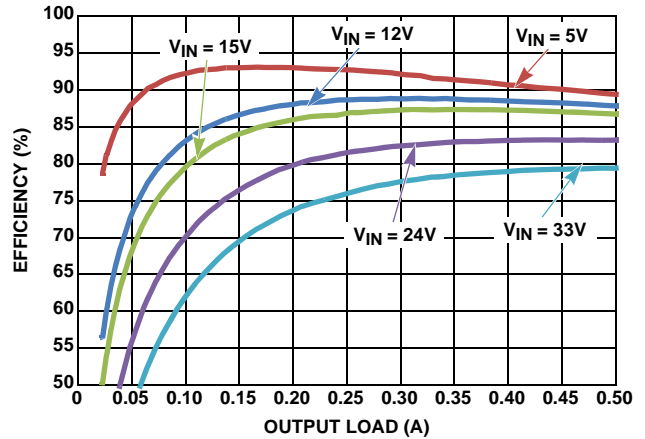


FIGURE 8. EFFICIENCY vs LOAD, PWM, $V_{OUT} = 3.3V$

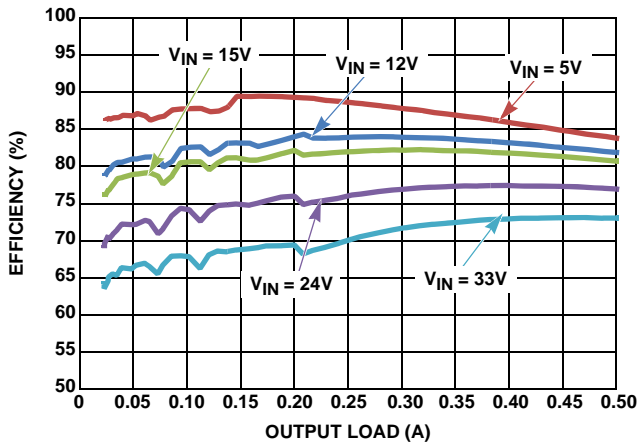


FIGURE 9. EFFICIENCY vs LOAD, PFM, $V_{OUT} = 1.8V$

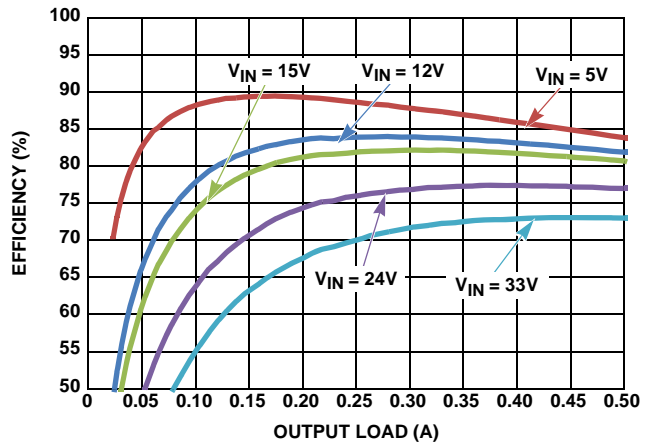


FIGURE 10. EFFICIENCY vs LOAD, PWM, $V_{OUT} = 1.8V$

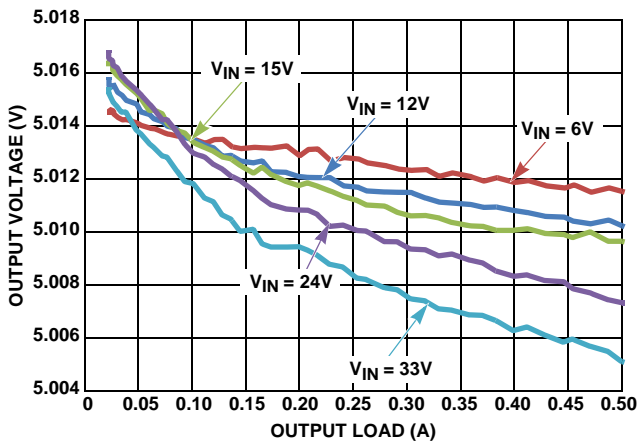


FIGURE 11. V_{OUT} REGULATION vs LOAD, PWM, $V_{OUT} = 5V$

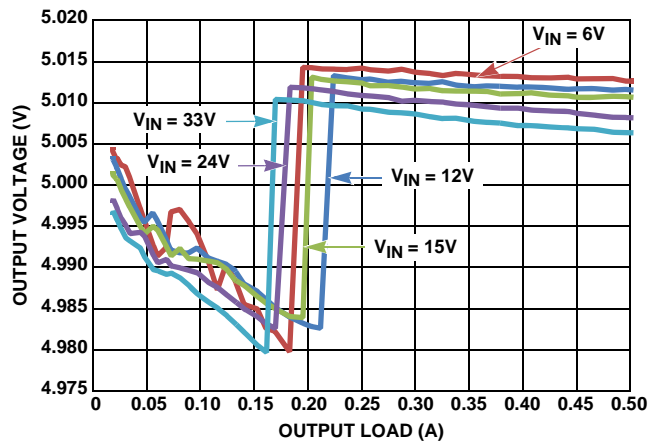


FIGURE 12. V_{OUT} REGULATION vs LOAD, PFM, $V_{OUT} = 5V$

Efficiency Curves $F_{SW} = 800\text{kHz}$, $T_A = +25^\circ\text{C}$ (Continued)

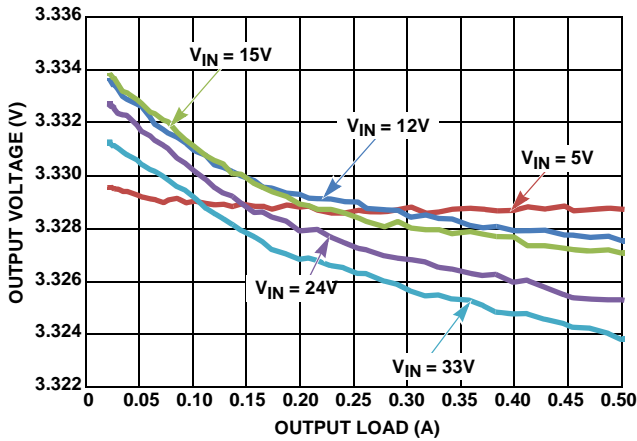


FIGURE 13. V_{OUT} REGULATION vs LOAD, PWM, $V_{OUT} = 3.3\text{V}$

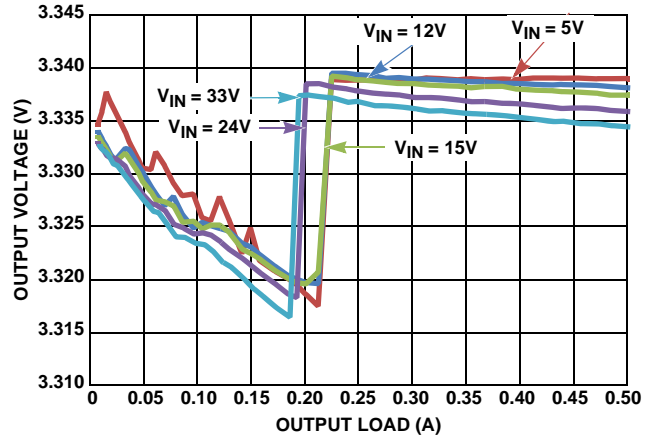


FIGURE 14. V_{OUT} REGULATION vs LOAD, PFM, $V_{OUT} = 3.3\text{V}$

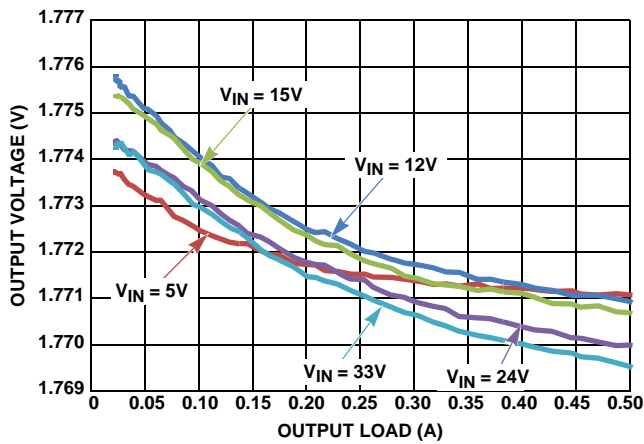


FIGURE 15. V_{OUT} REGULATION vs LOAD, PWM, $V_{OUT} = 1.8\text{V}$

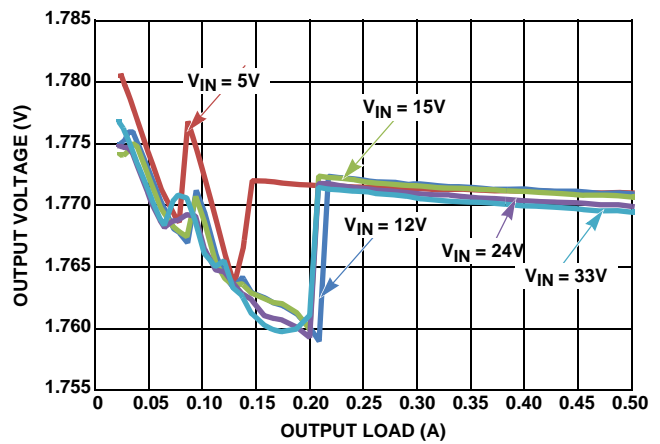


FIGURE 16. V_{OUT} REGULATION vs LOAD, PFM, $V_{OUT} = 1.8\text{V}$

Typical Performance Curves $V_{IN} = 24\text{V}$, $V_{OUT} = 3.3\text{V}$, $F_{SW} = 800\text{kHz}$, $T_A = +25^\circ\text{C}$.

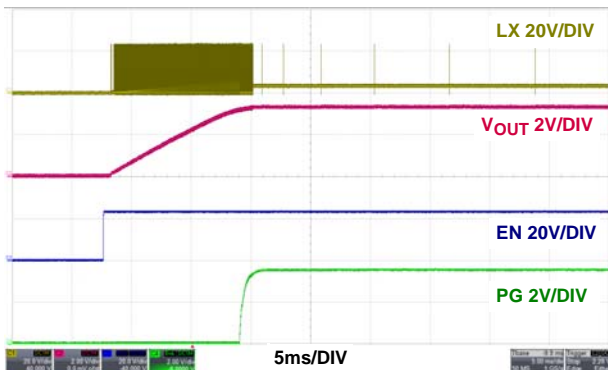


FIGURE 17. START-UP AT NO LOAD, PFM

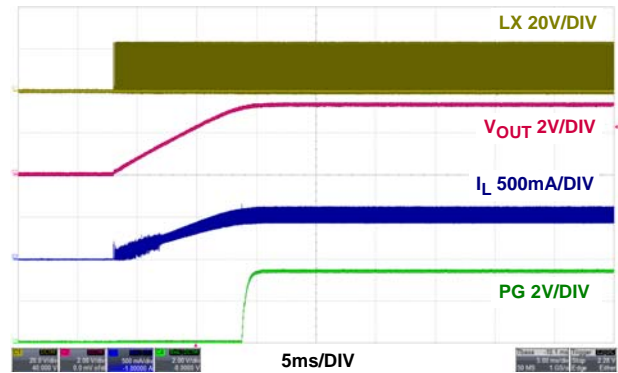


FIGURE 18. START-UP AT 500mA, PWM

Typical Performance Curves $V_{IN} = 24V, V_{OUT} = 3.3V, F_{SW} = 800kHz, T_A = +25^\circ C.$ (Continued)

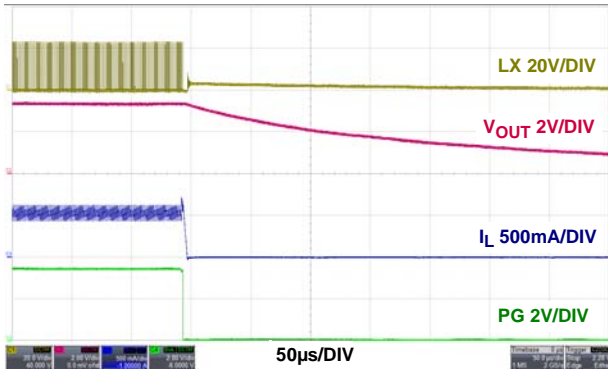


FIGURE 19. SHUTDOWN AT 500mA, PWM

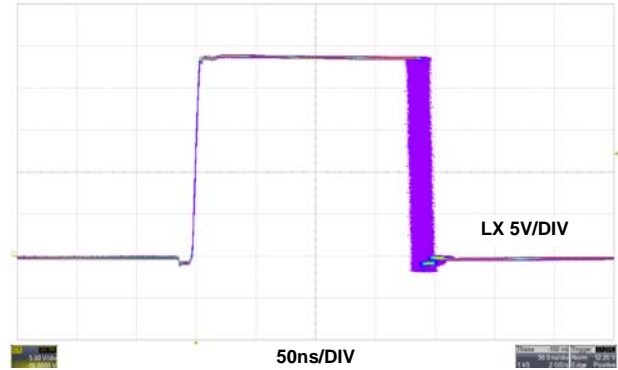


FIGURE 20. JITTER AT 500mA, PWM

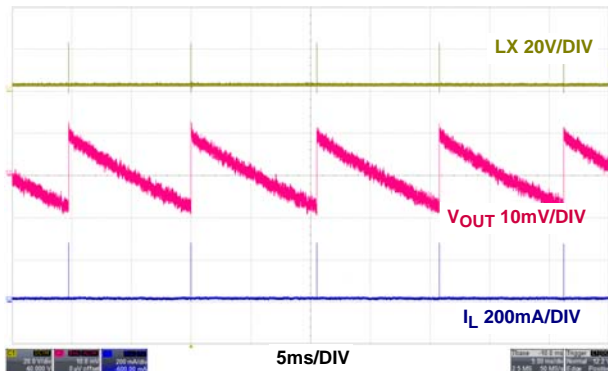


FIGURE 21. STEADY STATE AT NO LOAD, PFM

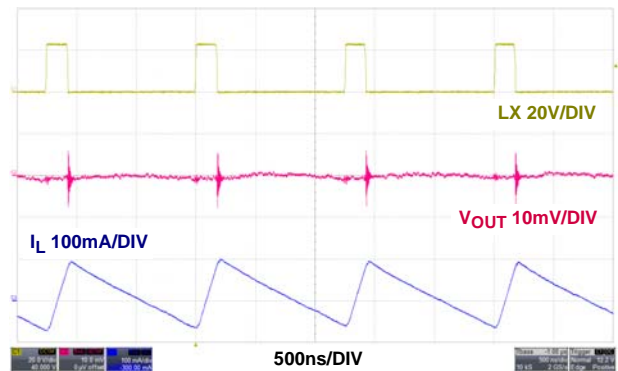


FIGURE 22. STEADY STATE AT NO LOAD, PWM

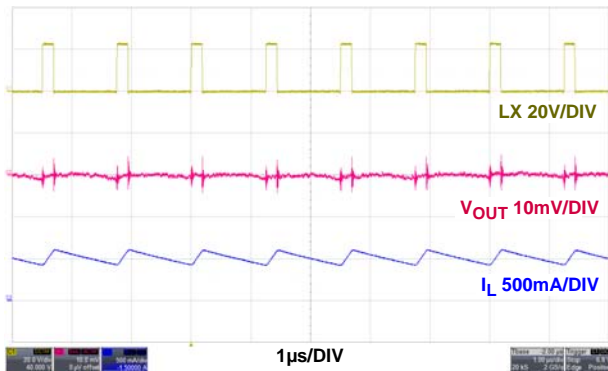


FIGURE 23. STEADY STATE AT 500mA LOAD, PWM

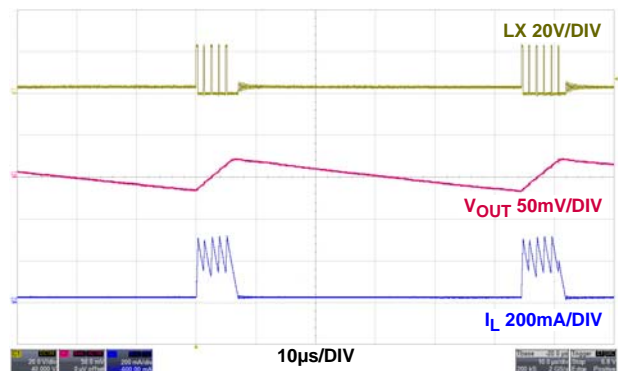


FIGURE 24. LIGHT LOAD OPERATION AT 20mA, PFM

Typical Performance Curves $V_{IN} = 24V, V_{OUT} = 3.3V, F_{SW} = 800kHz, T_A = +25^\circ C.$ (Continued)

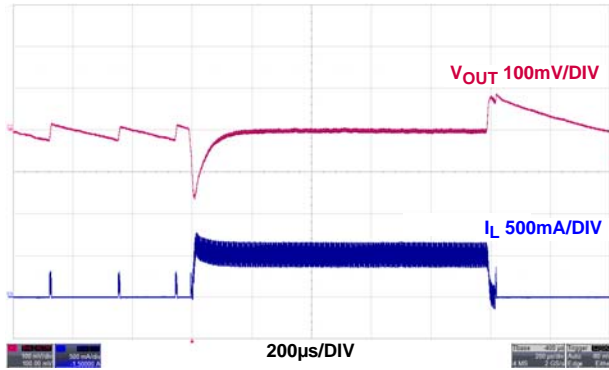


FIGURE 25. LOAD TRANSIENT, PFM

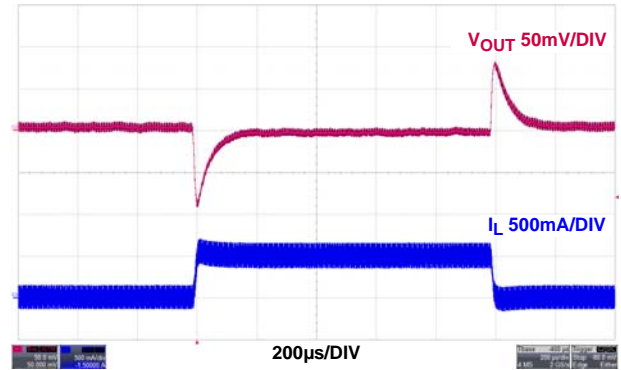


FIGURE 26. LOAD TRANSIENT, PWM

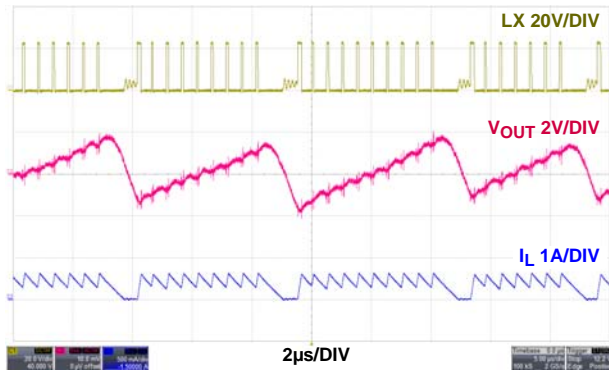


FIGURE 27. PFM TO PWM TRANSITION

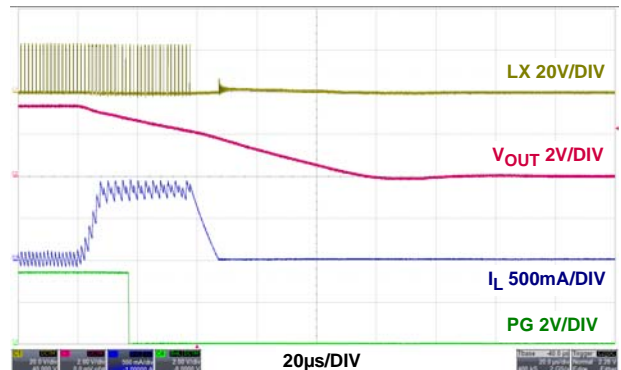


FIGURE 28. OVERCURRENT PROTECTION, PWM

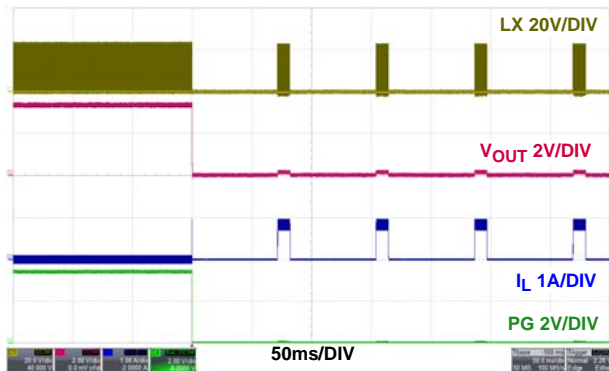


FIGURE 29. OVERCURRENT PROTECTION HICCUP, PWM

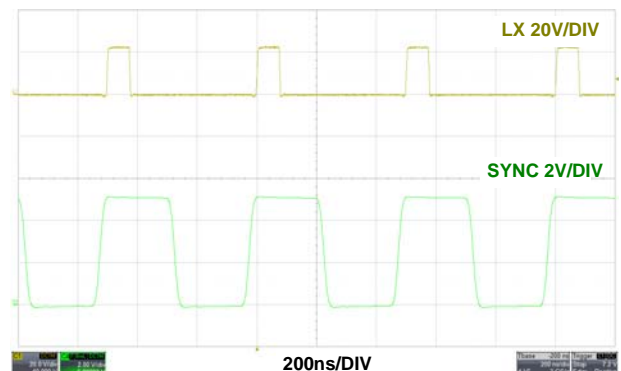


FIGURE 30. SYNC AT 500mA LOAD, PWM

Application Note 1859

Typical Performance Curves $V_{IN} = 24V, V_{OUT} = 3.3V, F_{SW} = 800kHz, T_A = +25^\circ C.$ (Continued)

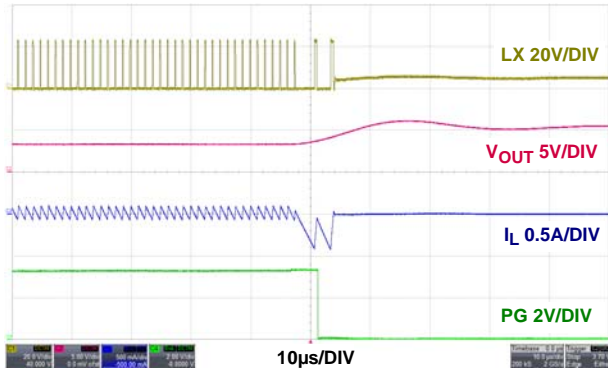


FIGURE 31. NEGATIVE CURRENT LIMIT, PWM

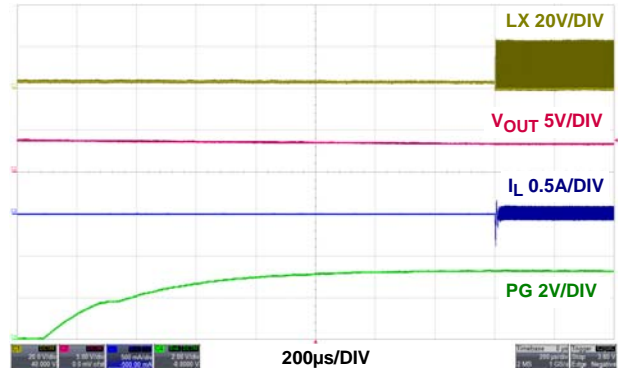


FIGURE 32. NEGATIVE CURRENT LIMIT RECOVERY, PWM

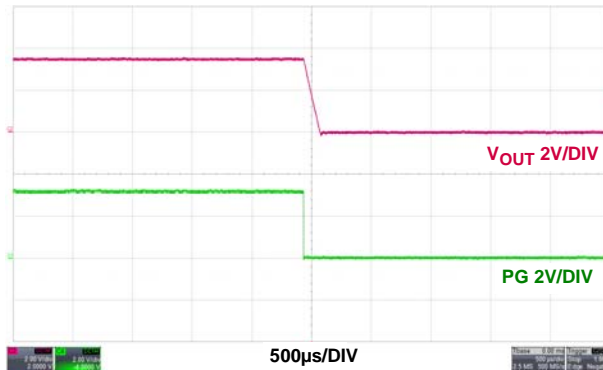


FIGURE 33. OVER-TEMPERATURE PROTECTION, PWM

Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that the Application Note or Technical Brief is current before proceeding.

For information regarding Intersil Corporation and its products, see www.intersil.com