

1100 Push Button Switches 0.125A 125Vac



T1100AA ---



T1101AA ---

- ▶ Miniature push button
- ▶ Ratings up to 500mA, 250Vac
- ▶ Snap in and flange mount
- ▶ With and without button
- ▶ Gold plated contacts
- ▶ Latching and momentary



T1100BB ---



T1100AC ---

Approvals and specifications



UL 0.125A 125Vac
UL 0.125A 45Vdc
UL file E45221

In house test:

0.5A 250Vac T85 — Indicative rating only

μ contact gap.


Technical data on pages 4 & 5.

T 1100 A A ---
TERMINAL FUNCTION ACTUATOR BODY OPTIONS


▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
T 1100 ON - OFF (alternate) Single pole ON - OFF (momentary ON) Single pole	 1100 ON - OFF (alternate) Single pole 1101 ON - OFF (momentary ON) Single pole	A Actuator without button B Softline button 	A For purpose designed facias and sub-panels 11.9 10.0 B Snap-in fixing 12.9 13.0 21.0 15.0 Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dimension X 19.1/19.2 19.3/19.4 19.7/19.8 C 2 Hole mounting 20.0 7.0 Min 5.0 Min Ø3.1 27.0 16.5

Dimensions (mm)

T1100AA (Enclosure mounting)

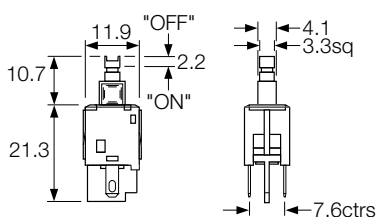

T1100AC (2 Hole Mounting) No.4 self-tapping screws

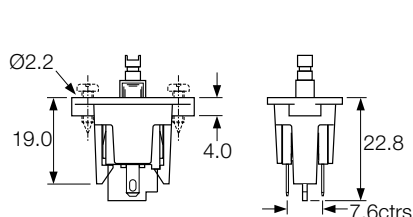

T1100BB (Snap-in) Cut-outs must be punched in the direction of insertion

