



SGM8067

1.5GHz, Rail-to-Rail Output CMOS Operational Amplifier

PRODUCT DESCRIPTION

The SGM8067 is rail-to-rail output voltage feedback amplifier offering ease of use. It has a wide input common-mode voltage range and output voltage swing, making it easy to use on single supplies as low as 2.5V.

The SGM8067 provides excellent overall performance. It offers high gain-bandwidth product to 1.5GHz and offers a typical low power of 16mA/amplifier.

The SGM8067 is low distortion and fast settling make it ideal for buffering high speed A/D or D/A converters. The SGM8067 has a power-down disable feature that reduces the supply current to 75 μ A. These features make the SGM8067 ideal for portable and battery-powered applications where size and power are critical. It is specified over the extended -40 $^{\circ}$ C to +125 $^{\circ}$ C temperature range.


APPLICATIONS

Imaging
Photodiode Preamp
Professional Video and Cameras
Hand Sets
DVD/CD
Base Stations
Filters
A-to-D Driver

FEATURES

- High Gain-Bandwidth Product: 1.5GHz
- Gain of 6 Stable
- Rail-to-Rail Output
2mV Typical V_{OS}
- Operates on 2.5V to 5.5V Supplies
- Input Voltage Range = -0.2V to +3.8V with $V_S = 5V$
- Low Power
16mA/Amplifier Typical Supply Current
SGM8067 75 μ A when Disabled
- Small Packaging
SGM8067 Available in SO-8

PIN CONFIGURATION (Top View)

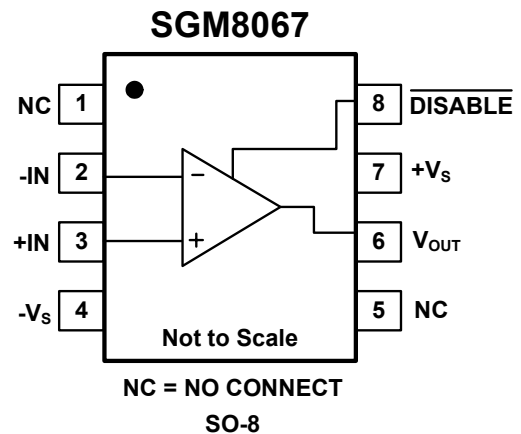

PACKAGE/ORDERING INFORMATION

MODEL	ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	MARKING INFORMATION
SGM8067	SGM8067XS/TR	SO-8	Tube	SGM8067XS

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V+ to V-	7.5V	Junction Temperature	160°C
Internal Power Dissipation		Operating Temperature Range	-55°C to +150°C
SO-8 Package	0.8W	Lead Temperature Range (Soldering 10 sec)	260°C
Common-Mode Input Voltage. (-V _S) - 0.5V to (+V _S) +0.5V			
Storage Temperature Range	-65°C to +150°C		

NOTE:

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications..




ELECTRICAL CHARACTERISTICS: $V_S = +5V$ (R_F = 402Ω, R_L = 150Ω, unless otherwise noted.)

PARAMETER	CONDITIONS	SGM8067							
		TYP	MIN/MAX OVER TEMPERATURE					UNITS	MIN/ MAX
		+25°C	+25°C	0°C to 70°C	-40°C to 85°C	-40°C to 125°C			
DYNAMIC PERFORMANCE									
Small-Signal Gain-Bandwidth	G = +5, R _L = 50Ω	195						MHz	TYP
	G = +10, R _L = 150Ω	150						MHz	TYP
	G = +10, R _L = 1KΩ	200						MHz	TYP
Gain-Bandwidth Product		1500						MHz	TYP
NOISE PERFORMANCE									
Input Voltage Noise	f = 1MHz	4						nV/√Hz	TYP
DC PERFORMANCE									
Input Offset Voltage (V _{OS})		2						mV	TYP
Input Bias Current (I _B)		6						PA	TYP
Input offset Current (I _{OS})		2						PA	TYP
Open-Loop Gain (A _{OL})	V _O = 0.3V to 4.7V, R _L = 150Ω	80	75	75	74	70		dB	MIN
	V _O = 0.2V to 4.8V, R _L = 1kΩ	104	90	90	89	80		dB	MIN
INPUT CHARACTERISTICS									
Input Common-Mode Voltage Range (V _{CM})		-0.2 to +3.8						V	TYP
Common-Mode Rejection Ratio (CMRR)	V _{CM} = -0.1V to +3.5V	80	66	65	64	62		dB	MIN
OUTPUT CHARACTERISTICS									
Output Voltage Swing from Rail	R _L = 150Ω	0.12						V	TYP
	R _L = 1KΩ	0.03						V	TYP
Output Current		120	100	98	93	87		mA	MIN
Closed-Loop Output Impedance	f < 100kHz	0.015						Ω	TYP
POWER-DOWN DISABLE									
DISABLE Voltage-Off			0.8					V	MAX
DISABLE Voltage-On			2					V	MIN
POWER SUPPLY									
Operating Voltage Range			2.5	2.7	2.7	2.7		V	MIN
			5.5	5.5	5.5	5.5		V	MAX
Quiescent Current		16						mA	TYP
Supply Current when Disabled		75	120	127	130	139		μA	MAX
Power Supply Rejection Ratio (PSRR)	ΔV _S = +2.7V to +5.5V, V _{CM} = (-V _S) + 0.5	80	66	66	65	63		dB	MIN

Specifications subject to change without notice.


TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = +5\text{V}$, unless otherwise noted.

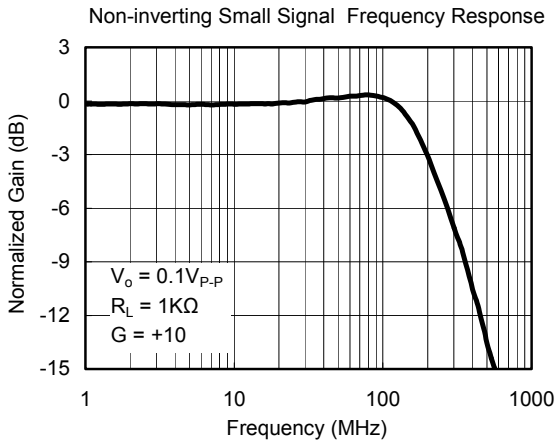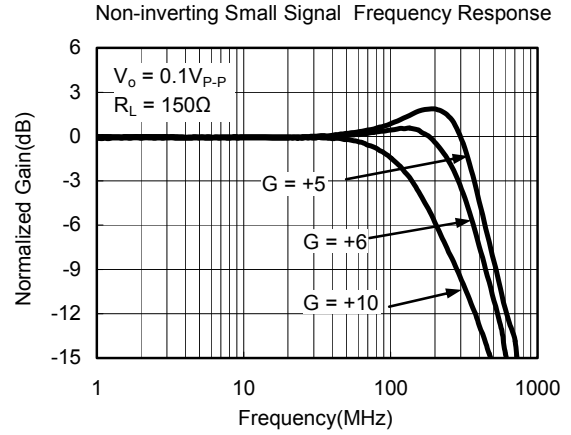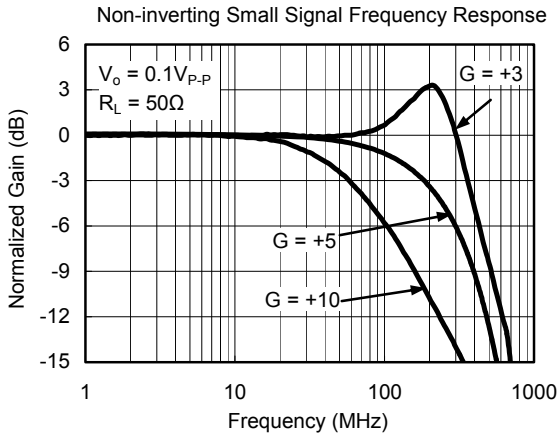

PACKAGE OUTLINE DIMENSIONS

SO-8

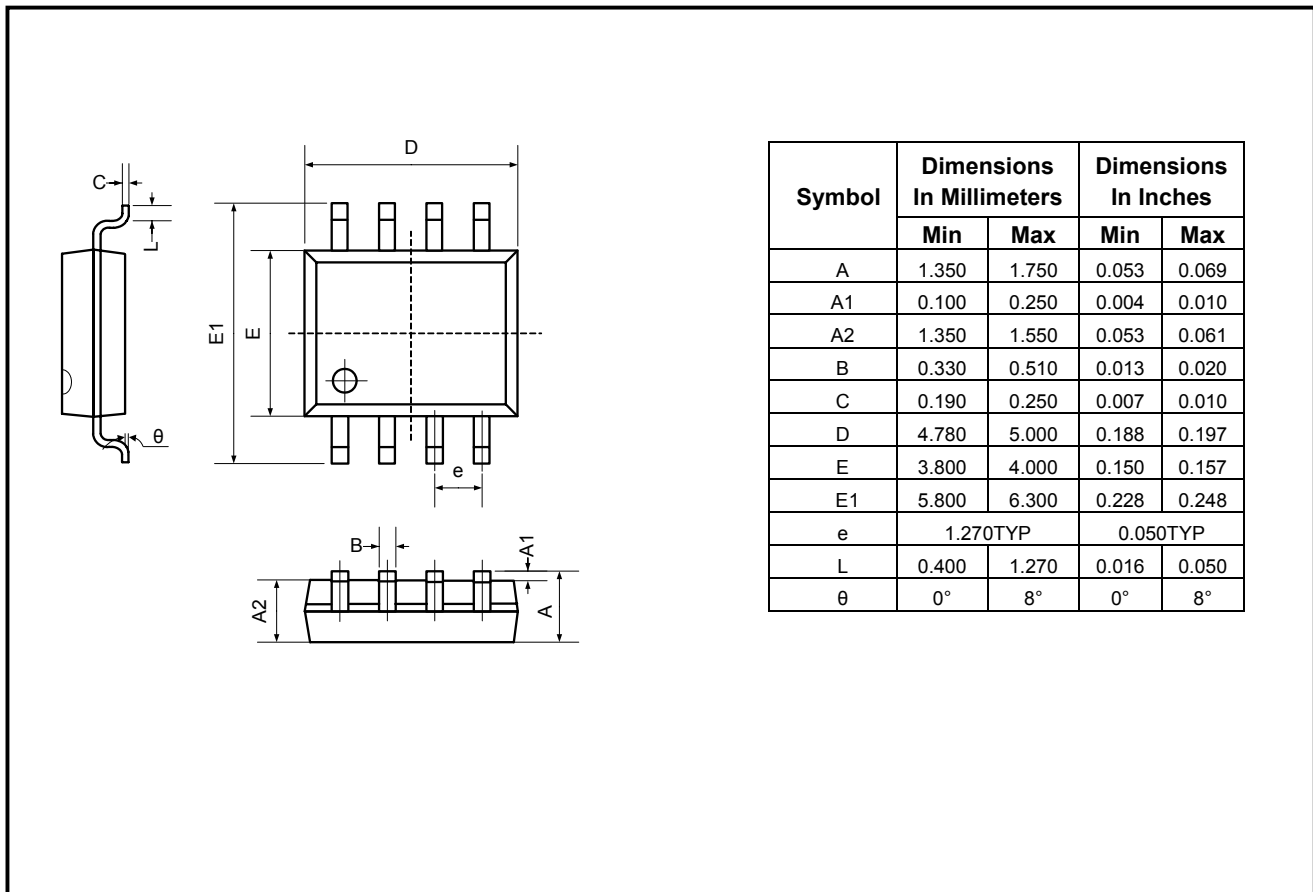

SGMICRO is dedicated to provide high quality and high performance analog IC products to customers. All SGMICRO products meet the highest industry standards with strict and comprehensive test and quality control systems to achieve world-class consistency and reliability.

For information regarding SGMICRO Corporation and its products, see www.sg-micro.com