


NTC Thermistors, Radial Leaded, Standard Precision



ADDITIONAL RESOURCES

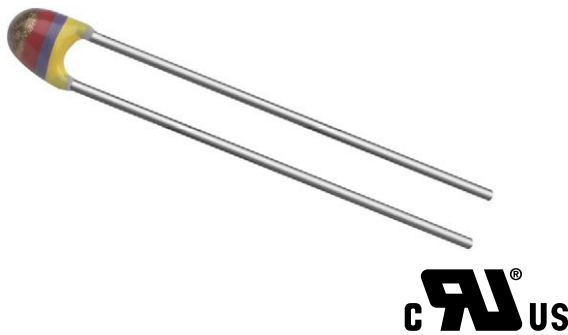

| QUICK REFERENCE DATA | | |
|--|--|--------------------|
| PARAMETER | VALUE | UNIT |
| Resistance value at 25 °C | 3.3 to 470K | Ω |
| Tolerance on R_{25} -value | $\pm 2; \pm 3; \pm 5$ | % |
| $B_{25/85}$ -value | 2880 to 4570 | K |
| Tolerance on $B_{25/85}$ -value | ± 0.5 to ± 3 | % |
| Operating temperature range: At zero power dissipation; continuously | -40 to +125 | $^{\circ}\text{C}$ |
| At zero power dissipation; for short periods | ≤ 150 | |
| Response time (in oil) | ≈ 1.2 | s |
| Thermal time constant τ (for information only) | 15 | s |
| Dissipation factor δ (for information only) | 7 8.5 (for R_{25} -value $\leq 680 \Omega$) | mW/K |
| Maximum power dissipation at 55 °C | 500 | mW |
| Climatic category (LCT / UCT / days) | 40 / 125 / 56 | - |
| Weight | ≈ 0.3 | g |

FEATURES

- Accuracy over a wide temperature range
- High stability over a long life
- Excellent price/performance ratio
- cULus recognized, file E148885 (category XGPU2/XGPU8)
- Mounting: radial
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

APPLICATIONS

- Temperature measurement, compensation, sensing and control in consumer and industrial applications

DESCRIPTION

These thermistors have a negative temperature coefficient. The part consists of a NTC chip, soldered between two tin plated copper wires. It has a gray base coating and is color band coded. The coating has no specified insulation properties.

PACKAGING

The thermistors are packed in bulk or tape on reel; see part numbers and relevant packaging quantities.

DESIGN-IN SUPPORT

For complete Curve Computation, visit:
www.vishay.com/thermistors/ntc-curve-list/

MARKING

The thermistors are marked with colored bands; see dimensions drawing and “Electrical data and ordering information”.

MOUNTING



By soldering in any position.
Not intended for potted applications.

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | |
|--|------------------------------|--------------------|---------------------------------|---------------------------|--------|-------|-----------------------------|--|--|
| R_{25} (Ω) | R_{25} -TOL. (\pm %) | $B_{25/85}$ (K) | $B_{25/85}$ -TOL. (\pm %) | COLOR CODE ⁽¹⁾ | | | UL RECOGNIZED (Y / N) | SAP MATERIAL AND ORDERING NUMBER ⁽²⁾ | |
| | | | | I | II | III | | NTCLE100E3...B0/T1/T2 RoHS COMPLIANT WITH EXEMPTION ⁽³⁾ | NTCLE100E3...B0A/T1A/T2A RoHS COMPLIANT |
| 3.3 | 2, 3, 5 | 2880 | 3 | Orange | Orange | Gold | N | 338*B0 | 338*B0A |
| 4.7 | 2, 3, 5 | 2880 | 3 | Yellow | Violet | Gold | N | 478*B0 | 478*B0A |
| 6.8 | 2, 3, 5 | 2880 | 3 | Blue | Grey | Gold | N | 688*B0 | 688*B0A |
| 10 | 2, 3, 5 | 2990 | 3 | Brown | Black | Black | N | 109*B0 | 109*B0A |
| 15 | 2, 3, 5 | 3041 | 3 | Brown | Green | Black | N | 159*B0 | 159*B0A |
| 22 | 2, 3, 5 | 3136 | 3 | Red | Red | Black | N | 229*B0 | 229*B0A |
| 33 | 2, 3, 5 | 3390 | 3 | Orange | Orange | Black | Y | 339*B0 | 339*B0A |
| 47 | 2, 3, 5 | 3390 | 3 | Yellow | Violet | Black | Y | 479*B0 | 479*B0A |
| 68 | 2, 3, 5 | 3390 | 3 | Blue | Grey | Black | Y | 689*B0 | 689*B0A |
| 100 | 2, 3, 5 | 3560 | 1.5 | Brown | Black | Brown | Y | 101*B0 | 101*B0A |
| 150 | 2, 3, 5 | 3560 | 1.5 | Brown | Green | Brown | Y | 151*B0 | 151*B0A |
| 220 | 2, 3, 5 | 3560 | 1.5 | Red | Red | Brown | Y | 221*B0 | 221*B0A |

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | |
|---|------------------------------|--------------------|---------------------------------|---------------------------|--------|--------|-----------------------------|--|--|
| R_{25} (Ω) | R_{25} -TOL. (\pm %) | $B_{25/85}$ (K) | $B_{25/85}$ -TOL. (\pm %) | COLOR CODE ⁽¹⁾ | | | UL RECOGNIZED (Y / N) | SAP MATERIAL AND ORDERING NUMBER ⁽²⁾ | |
| | | | | I | II | III | | NTCLE100E3...B0/T1/T2 RoHS COMPLIANT WITH EXEMPTION ⁽³⁾ | NTCLE100E3...B0A/T1A/T2A RoHS COMPLIANT |
| 330 | 2, 3, 5 | 3560 | 1.5 | Orange | Orange | Brown | Y | 331*B0 | 331*B0A |
| 470 | 2, 3, 5 | 3560 | 1.5 | Yellow | Violet | Brown | Y | 471*B0 | 471*B0A |
| 680 | 2, 3, 5 | 3560 | 1.5 | Blue | Grey | Brown | Y | 681*B0 | 681*B0A |
| 1000 | 2, 3, 5 | 3528 | 0.5 | Brown | Black | Red | Y | 102*B0 | 102*B0A |
| 1500 | 2, 3, 5 | 3528 | 0.5 | Brown | Green | Red | Y | 152*B0 | 152*B0A |
| 2000 | 2, 3, 5 | 3528 | 0.5 | Red | Black | Red | Y | 202*B0 | 202*B0A |
| 2200 | 2, 3, 5 | 3977 | 0.75 | Red | Red | Red | Y | 222*B0 | 222*B0A |
| 2700 | 2, 3, 5 | 3977 | 0.75 | Red | Violet | Red | Y | 272*B0 | 272*B0A |
| 3300 | 2, 3, 5 | 3977 | 0.75 | Orange | Orange | Red | Y | 332*B0 | 332*B0A |
| 4700 | 2, 3, 5 | 3977 | 0.75 | Yellow | Violet | Red | Y | 472*B0 | 472*B0A |
| 5000 | 2, 3, 5 | 3977 | 0.75 | Green | Black | Red | Y | 502*B0 | 502*B0A |
| 6800 | 2, 3, 5 | 3977 | 0.75 | Blue | Grey | Red | Y | 682*B0 | 682*B0A |
| 10 000 | 2, 3, 5 | 3977 | 0.75 | Brown | Black | Orange | Y | 103*B0 | 103*B0A |
| 12 000 | 2, 3, 5 | 3740 | 2 | Brown | Red | Orange | Y | 123*B0 | 123*B0A |
| 15 000 | 2, 3, 5 | 3740 | 2 | Brown | Green | Orange | Y | 153*B0 | 153*B0A |
| 22 000 | 2, 3, 5 | 3740 | 2 | Red | Red | Orange | Y | 223*B0 | 223*B0A |
| 33 000 | 2, 3, 5 | 4090 | 1.5 | Orange | Orange | Orange | Y | 333*B0 | 333*B0A |
| 47 000 | 2, 3, 5 | 4090 | 1.5 | Yellow | Violet | Orange | Y | 473*B0 | 473*B0A |
| 50 000 | 2, 3, 5 | 4190 | 1.5 | Green | Black | Orange | Y | 503*B0 | 503*B0A |
| 68 000 | 2, 3, 5 | 4190 | 1.5 | Blue | Grey | Orange | Y | 683*B0 | 683*B0A |
| 100 000 | 2, 3, 5 | 4190 | 1.5 | Brown | Black | Yellow | Y | 104*B0 | 104*B0A |
| 150 000 | 2, 3, 5 | 4370 | 2.5 | Brown | Green | Yellow | Y | 154*B0 | 154*B0A |
| 220 000 | 2, 3, 5 | 4370 | 2.5 | Red | Red | Yellow | Y | 224*B0 | 224*B0A |
| 330 000 | 2, 3, 5 | 4570 | 1.5 | Orange | Orange | Yellow | N | 334*B0 | 334*B0A |
| 470 000 | 2, 3, 5 | 4570 | 1.5 | Yellow | Violet | Yellow | N | 474*B0 | 474*B0A |

Notes

- (1) For $R_{25} \pm 2\%$ band IV is red, $\pm 3\%$ band IV is orange, $\pm 5\%$ band IV is gold
- (2) Replace * in SAP by J for 5 %, H for 3 %, G for 2 %
- (3) RoHS exemption 7(c)-I: electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezo-electronic devices, or in a glass or ceramic matrix compound

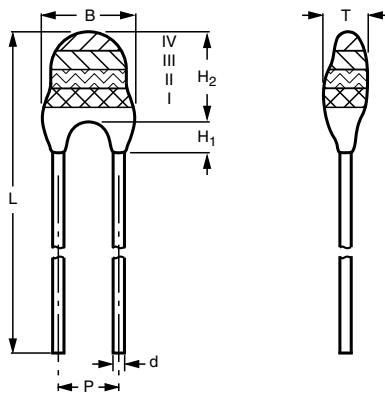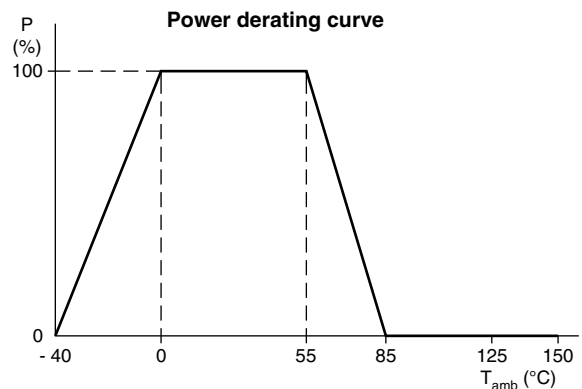
DIMENSIONS in millimeters

POWER DERATING

Note

- Zero power is considered as measuring power max. 1 % of max. power. Voltage on the NTC should always be below 50 V_{DC}


| PHYSICAL DIMENSIONS FOR RELEVANT TYPE (all dimensions in millimeters) | | | | | | | | |
|--|---------------|----------------|-------|------|------------|--------------|------|------------|
| R_{25} -VALUE | $B_{MAX.}$ | d | H_1 | | H_2 MAX. | L | P | $T_{MAX.}$ |
| | | | MIN. | MAX. | | | | |
| 3.3 Ω to 220 Ω | 5.0 | 0.6 \pm 0.06 | 1.0 | 4.0 | 6.0 | 24 \pm 1.5 | 2.54 | 4.0 |
| 330 Ω to 470 k Ω | 3.3 \pm 0.5 | 0.6 \pm 0.06 | 1.0 | 3.0 | 6.0 | 24 \pm 1.5 | 2.54 | 3.0 |

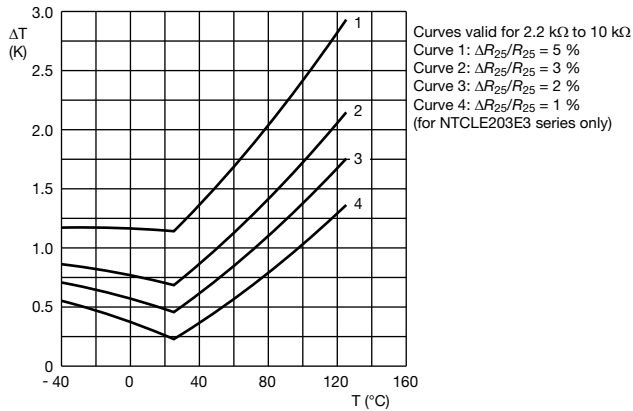

TEMPERATURE DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE




TEMPERATURE DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE

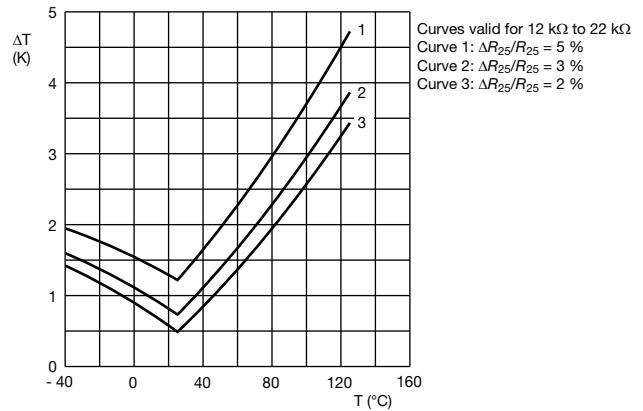

TEMPERATURE DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE




TEMPERATURE DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE

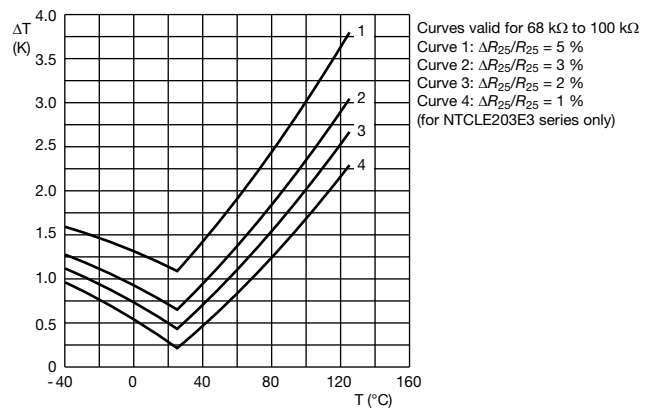

TEMPERATURE DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE



TEMPERATURE DEVIATION AS A FUNCTION OF THE AMBIENT TEMPERATURE

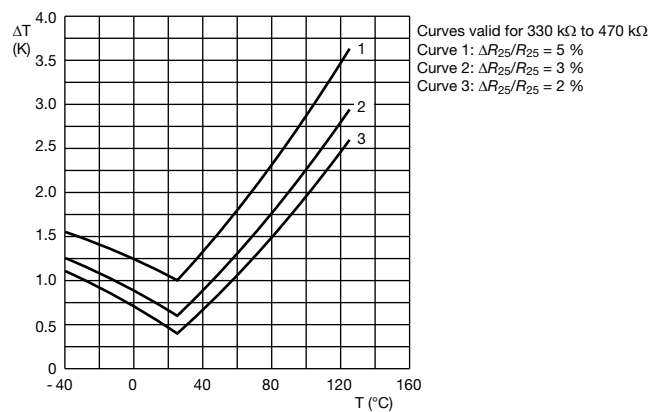



R_T VALUE AND TOLERANCE

These thermistors have a narrow tolerance on the B-value, the result of which provides a very small tolerance on the nominal resistance value over a wide temperature range. For this reason the usual graphs of R = f(T) are replaced by Resistance Values at Intermediate Temperatures Tables, together with a formula to calculate the characteristics with a high precision.

FORMULAE TO DETERMINE NOMINAL RESISTANCE VALUES

The resistance values at intermediate temperatures, or the operating temperature values, can be calculated using the following interpolation laws (extended "Steinhart and Hart"):

R_(T) = R_{ref} x e^(A+B/T+C/T²+D/T³)
T_(R) = (A₁ + B₁ ln(R/R_{ref}) + C₁ ln²(R/R_{ref}) + D₁ ln³(R/R_{ref}))⁻¹

where:

A, B, C, D, A₁, B₁, C₁ and D₁ are constant values depending on the material concerned; see table below.

R_{ref} is the resistance value at a reference temperature (in this event 25 °C, R_{ref} = R₂₅).

T is the temperature in K. T (°C) = T (K) - 273.15

Formulae numbered and are interchangeable with an error of max. 0.005 °C in the range 25 °C to 125 °C and max. 0.015 °C in the range -40 °C to +25 °C.

DETERMINATION OF THE RESISTANCE/TEMPERATURE DEVIATION FROM NOMINAL VALUE

The total resistance deviation is obtained by combining the "R₂₅-tolerance" and the "resistance deviation due to B-tolerance".

When:

X = R₂₅-tolerance

Y = resistance deviation due to B-tolerance

Z = complete resistance deviation,

then: Z = [(1 + X/100) x (1 + Y/100) - 1] x 100 % or Z ≈ X + Y

When:

TCR = temperature coefficient

ΔT = temperature deviation,

then: ΔT = Z / TCR

The temperature tolerances are plotted in the graphs on the previous page.

Example: at 0 °C, assume X = 5 %, Y = 0.92 % and TCR = 5.09 %/K (see table), then:

Z = [1 + 5/100] x [1 + 0.92/100] - 1 x 100 % = {1.05 x 1.0092 - 1} x 100 % = 5.966 %

ΔT = Z / TCR = 5.966 / 5.09 ≈ 1.17 °C

A NTC with a R₂₅-value of 10 kΩ has a value of 32.55 kΩ between -1.17 °C and +1.17 °C.

Table with 12 columns: NUMBER, B25/85 (K), NAME, TOL. B (%), A, B (K), C (K^2), D (K^3), A1, B1 (K^-1), C1 (K^-2), D1 (K^-3). Rows 1-13 list various materials and their parameters.

Notes

(1) Temperature < 25 °C

(2) Temperature ≥ 25 °C



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (3.3, 4.7, 6.8) Ω | | | | | |
|---|---------------------------------|---------------------------------|---------------------------------|--------------|--------------------------------------|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3338*** | PART NUMBER NTCLE100E3478*** | PART NUMBER NTCLE100E3688*** | TCR (%/K) | $\Delta R/R$ DUE TO B_{tol} (%) |
| | R_T (Ω) | R_T (Ω) | R_T (Ω) | | |
| -40 | 45.00 | 64.09 | 92.73 | -4.97 | 8.08 |
| -35 | 35.25 | 50.20 | 72.63 | -4.80 | 7.30 |
| -30 | 27.84 | 39.64 | 57.36 | -4.64 | 6.55 |
| -25 | 22.16 | 31.56 | 45.66 | -4.48 | 5.84 |
| -20 | 17.78 | 25.32 | 36.63 | -4.33 | 5.15 |
| -15 | 14.37 | 20.46 | 29.60 | -4.19 | 4.49 |
| -10 | 11.69 | 16.65 | 24.09 | -4.05 | 3.85 |
| -5 | 9.582 | 13.65 | 19.74 | -3.92 | 3.24 |
| 0 | 7.904 | 11.26 | 16.29 | -3.79 | 2.65 |
| 5 | 6.560 | 9.344 | 13.52 | -3.66 | 2.08 |
| 10 | 5.479 | 7.803 | 11.29 | -3.55 | 1.54 |
| 15 | 4.602 | 6.554 | 9.482 | -3.43 | 1.01 |
| 20 | 3.886 | 5.535 | 8.008 | -3.32 | 0.49 |
| 25 | 3.300 | 4.700 | 6.800 | -3.22 | 0.00 |
| 30 | 2.816 | 4.011 | 5.803 | -3.12 | 0.48 |
| 35 | 2.415 | 3.440 | 4.977 | -3.02 | 0.94 |
| 40 | 2.081 | 2.964 | 4.289 | -2.93 | 1.39 |
| 45 | 1.801 | 2.566 | 3.712 | -2.84 | 1.82 |
| 50 | 1.566 | 2.230 | 3.227 | -2.76 | 2.24 |
| 55 | 1.367 | 1.947 | 2.817 | -2.68 | 2.65 |
| 60 | 1.198 | 1.706 | 2.469 | -2.60 | 3.04 |
| 65 | 1.054 | 1.501 | 2.172 | -2.52 | 3.43 |
| 70 | 0.9308 | 1.326 | 1.918 | -2.45 | 3.80 |
| 75 | 0.8248 | 1.175 | 1.700 | -2.38 | 4.16 |
| 80 | 0.7334 | 1.044 | 1.511 | -2.32 | 4.51 |
| 85 | 0.6542 | 0.9318 | 1.348 | -2.25 | 4.85 |
| 90 | 0.5854 | 0.8338 | 1.206 | -2.19 | 5.19 |
| 95 | 0.5255 | 0.7484 | 1.083 | -2.13 | 5.51 |
| 100 | 0.4730 | 0.6737 | 0.9748 | -2.07 | 5.82 |
| 105 | 0.4270 | 0.6082 | 0.8799 | -2.02 | 6.13 |
| 110 | 0.3865 | 0.5505 | 0.7965 | -1.97 | 6.43 |
| 115 | 0.3508 | 0.4996 | 0.7228 | -1.92 | 6.72 |
| 120 | 0.3192 | 0.4545 | 0.6576 | -1.87 | 7.00 |
| 125 | 0.2911 | 0.4145 | 0.5998 | -1.82 | 7.28 |
| 130 | 0.2661 | 0.3789 | 0.5483 | -1.77 | 7.55 |
| 135 | 0.2438 | 0.3472 | 0.5023 | -1.73 | 7.81 |
| 140 | 0.2238 | 0.3188 | 0.4612 | -1.69 | 8.07 |
| 145 | 0.2059 | 0.2933 | 0.4244 | -1.65 | 8.32 |
| 150 | 0.1899 | 0.2704 | 0.3912 | -1.61 | 8.56 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (10, 15, 22) Ω | | | | | | | | | |
|--|---------------------------------|--------------|---------------------------------------|---------------------------------|--------------|---------------------------------------|---------------------------------|--------------|---------------------------------------|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3109*** | | | PART NUMBER NTCLE100E3159*** | | | PART NUMBER NTCLE100E3229*** | | |
| | R_T (Ω) | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) | R_T (Ω) | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) | R_T (Ω) | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) |
| -40 | 136.7 | -4.86 | 8.39 | 224.8 | -5.16 | 8.65 | 374.9 | -5.54 | 8.80 |
| -35 | 107.6 | -4.72 | 7.58 | 174.5 | -4.98 | 7.79 | 285.8 | -5.31 | 7.95 |
| -30 | 85.32 | -4.58 | 6.81 | 136.6 | -4.80 | 6.98 | 220.4 | -5.10 | 7.14 |
| -25 | 68.10 | -4.44 | 6.06 | 107.9 | -4.64 | 6.21 | 171.7 | -4.90 | 6.36 |
| -20 | 54.72 | -4.31 | 5.35 | 85.94 | -4.48 | 5.47 | 135.0 | -4.71 | 5.61 |
| -15 | 44.25 | -4.18 | 4.66 | 68.96 | -4.33 | 4.76 | 107.2 | -4.53 | 4.89 |
| -10 | 36.02 | -4.06 | 4.00 | 55.74 | -4.19 | 4.08 | 85.79 | -4.37 | 4.20 |
| -5 | 29.49 | -3.94 | 3.37 | 45.37 | -4.05 | 3.43 | 69.21 | -4.22 | 3.53 |
| 0 | 24.30 | -3.82 | 2.75 | 37.17 | -3.92 | 2.81 | 56.26 | -4.07 | 2.89 |
| 5 | 20.13 | -3.71 | 2.16 | 30.65 | -3.80 | 2.20 | 46.05 | -3.94 | 2.27 |
| 10 | 16.77 | -3.60 | 1.59 | 25.42 | -3.68 | 1.62 | 37.94 | -3.81 | 1.67 |
| 15 | 14.04 | -3.50 | 1.04 | 21.21 | -3.57 | 1.06 | 31.45 | -3.69 | 1.10 |
| 20 | 11.82 | -3.39 | 0.51 | 17.79 | -3.46 | 0.52 | 26.23 | -3.57 | 0.54 |
| 25 | 10.00 | -3.30 | 0.00 | 15.00 | -3.36 | 0.00 | 22.00 | -3.47 | 0.00 |
| 30 | 8.500 | -3.20 | 0.50 | 12.76 | -3.26 | 0.49 | 18.55 | -3.36 | 0.52 |
| 35 | 7.259 | -3.11 | 0.98 | 10.86 | -3.17 | 0.98 | 15.72 | -3.26 | 1.02 |
| 40 | 6.226 | -3.03 | 1.44 | 9.291 | -3.08 | 1.46 | 13.38 | -3.17 | 1.51 |
| 45 | 5.363 | -2.94 | 1.89 | 7.982 | -2.99 | 1.92 | 11.45 | -3.08 | 1.98 |
| 50 | 4.639 | -2.86 | 2.33 | 6.887 | -2.91 | 2.36 | 9.833 | -3.00 | 2.44 |
| 55 | 4.029 | -2.78 | 2.75 | 5.966 | -2.83 | 2.79 | 8.482 | -2.92 | 2.88 |
| 60 | 3.512 | -2.71 | 3.16 | 5.189 | -2.75 | 3.21 | 7.346 | -2.84 | 3.32 |
| 65 | 3.073 | -2.64 | 3.56 | 4.529 | -2.68 | 3.62 | 6.386 | -2.76 | 3.73 |
| 70 | 2.698 | -2.57 | 3.95 | 3.968 | -2.61 | 4.02 | 5.572 | -2.69 | 4.14 |
| 75 | 2.377 | -2.50 | 4.32 | 3.488 | -2.54 | 4.41 | 4.879 | -2.62 | 4.53 |
| 80 | 2.101 | -2.43 | 4.69 | 3.077 | -2.48 | 4.78 | 4.286 | -2.56 | 4.91 |
| 85 | 1.864 | -2.37 | 5.04 | 2.722 | -2.41 | 5.15 | 3.777 | -2.50 | 5.29 |
| 90 | 1.658 | -2.31 | 5.38 | 2.416 | -2.35 | 5.51 | 3.339 | -2.44 | 5.65 |
| 95 | 1.479 | -2.25 | 5.72 | 2.151 | -2.30 | 5.85 | 2.960 | -2.38 | 6.00 |
| 100 | 1.323 | -2.20 | 6.05 | 1.920 | -2.24 | 6.19 | 2.632 | -2.32 | 6.34 |
| 105 | 1.187 | -2.14 | 6.36 | 1.719 | -2.19 | 6.53 | 2.347 | -2.27 | 6.68 |
| 110 | 1.068 | -2.09 | 6.67 | 1.543 | -2.13 | 6.85 | 2.098 | -2.22 | 7.00 |
| 115 | 0.9635 | -2.04 | 6.98 | 1.389 | -2.08 | 7.17 | 1.880 | -2.17 | 7.32 |
| 120 | 0.8712 | -1.99 | 7.27 | 1.253 | -2.03 | 7.48 | 1.689 | -2.12 | 7.62 |
| 125 | 0.7897 | -1.94 | 7.56 | 1.133 | -1.99 | 7.78 | 1.521 | -2.07 | 7.93 |
| 130 | 0.7174 | -1.90 | 7.84 | 1.027 | -1.94 | 8.08 | 1.373 | -2.03 | 8.22 |
| 135 | 0.6533 | -1.85 | 8.11 | 0.9326 | -1.90 | 8.37 | 1.242 | -1.98 | 8.50 |
| 140 | 0.5961 | -1.81 | 8.37 | 0.8490 | -1.86 | 8.65 | 1.126 | -1.94 | 8.78 |
| 145 | 0.5451 | -1.77 | 8.63 | 0.7744 | -1.82 | 8.93 | 1.023 | -1.90 | 9.06 |
| 150 | 0.4995 | -1.73 | 8.89 | 0.7079 | -1.78 | 9.20 | 0.9309 | -1.86 | 9.32 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (33, 47, 68) Ω | | | | | |
|--|---------------------------------|---------------------------------|---------------------------------|--------------|---------------------------------------|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3339*** | PART NUMBER NTCLE100E3479*** | PART NUMBER NTCLE100E3689*** | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) |
| | R_T (Ω) | R_T (Ω) | R_T (Ω) | | |
| -40 | 707.0 | 1007 | 1457 | -5.94 | 9.30 |
| -35 | 528.5 | 752.7 | 1089 | -5.70 | 8.44 |
| -30 | 399.5 | 569.0 | 823.3 | -5.49 | 7.60 |
| -25 | 305.3 | 434.8 | 629.1 | -5.28 | 6.79 |
| -20 | 235.6 | 335.6 | 485.5 | -5.09 | 6.01 |
| -15 | 183.5 | 261.4 | 378.2 | -4.90 | 5.25 |
| -10 | 144.3 | 205.5 | 297.3 | -4.73 | 4.51 |
| -5 | 114.3 | 162.8 | 235.6 | -4.57 | 3.80 |
| 0 | 91.34 | 130.1 | 188.2 | -4.42 | 3.11 |
| 5 | 73.51 | 104.7 | 151.5 | -4.27 | 2.45 |
| 10 | 59.59 | 84.87 | 122.8 | -4.13 | 1.80 |
| 15 | 48.63 | 69.26 | 100.2 | -4.00 | 1.18 |
| 20 | 39.94 | 56.88 | 82.29 | -3.88 | 0.58 |
| 25 | 33.00 | 47.00 | 68.00 | -3.76 | 0.00 |
| 30 | 27.43 | 39.06 | 56.51 | -3.64 | 0.56 |
| 35 | 22.92 | 32.64 | 47.23 | -3.54 | 1.11 |
| 40 | 19.26 | 27.42 | 39.68 | -3.43 | 1.63 |
| 45 | 16.26 | 23.16 | 33.50 | -3.34 | 2.14 |
| 50 | 13.79 | 19.65 | 28.42 | -3.24 | 2.63 |
| 55 | 11.76 | 16.74 | 24.23 | -3.15 | 3.11 |
| 60 | 10.06 | 14.33 | 20.74 | -3.07 | 3.57 |
| 65 | 8.652 | 12.32 | 17.83 | -2.98 | 4.02 |
| 70 | 7.468 | 10.64 | 15.39 | -2.90 | 4.45 |
| 75 | 6.471 | 9.216 | 13.33 | -2.83 | 4.87 |
| 80 | 5.628 | 8.015 | 11.60 | -2.76 | 5.27 |
| 85 | 4.912 | 6.996 | 10.12 | -2.69 | 5.66 |
| 90 | 4.302 | 6.127 | 8.865 | -2.62 | 6.04 |
| 95 | 3.780 | 5.384 | 7.790 | -2.55 | 6.41 |
| 100 | 3.332 | 4.746 | 6.867 | -2.49 | 6.77 |
| 105 | 2.946 | 4.196 | 6.071 | -2.43 | 7.11 |
| 110 | 2.613 | 3.721 | 5.384 | -2.37 | 7.45 |
| 115 | 2.324 | 3.310 | 4.788 | -2.32 | 7.77 |
| 120 | 2.072 | 2.951 | 4.270 | -2.26 | 8.09 |
| 125 | 1.853 | 2.639 | 3.818 | -2.21 | 8.39 |
| 130 | 1.661 | 2.365 | 3.422 | -2.16 | 8.69 |
| 135 | 1.492 | 2.125 | 3.075 | -2.11 | 8.97 |
| 140 | 1.344 | 1.914 | 2.770 | -2.07 | 9.25 |
| 145 | 1.213 | 1.728 | 2.500 | -2.02 | 9.52 |
| 150 | 1.098 | 1.564 | 2.262 | -1.98 | 9.79 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (100, 150, 220, 330, 470, 680) Ω | | | | | | | | |
|---|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------|--|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3101*** | PART NUMBER NTCLE100E3151*** | PART NUMBER NTCLE100E3221*** | PART NUMBER NTCLE100E3331*** | PART NUMBER NTCLE100E3471*** | PART NUMBER NTCLE100E3681*** | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) |
| | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | | |
| -40 | 2193 | 3289 | 4824 | 7236 | 10 305 | 14 910 | -5.75 | 4.99 |
| -35 | 1652 | 2478 | 3635 | 5452 | 7766 | 11 235 | -5.57 | 4.51 |
| -30 | 1256 | 1884 | 2763 | 4144 | 5902 | 8540 | -5.40 | 4.05 |
| -25 | 962.5 | 1444 | 2117 | 3176 | 4524 | 6545 | -5.24 | 3.61 |
| -20 | 743.6 | 1115 | 1636 | 2454 | 3495 | 5057 | -5.08 | 3.19 |
| -15 | 579.0 | 868.5 | 1274 | 1911 | 2721 | 3937 | -4.93 | 2.78 |
| -10 | 454.2 | 681.2 | 999.1 | 1499 | 2135 | 3088 | -4.78 | 2.38 |
| -5 | 358.8 | 538.2 | 789.4 | 1184 | 1686 | 2440 | -4.64 | 2.01 |
| 0 | 285.4 | 428.2 | 628.0 | 942.0 | 1342 | 1941 | -4.51 | 1.64 |
| 5 | 228.6 | 342.9 | 502.9 | 754.4 | 1074 | 1554 | -4.38 | 1.29 |
| 10 | 184.2 | 276.4 | 405.3 | 608.0 | 866.0 | 1253 | -4.25 | 0.95 |
| 15 | 149.4 | 224.1 | 328.7 | 493.1 | 702.2 | 1016 | -4.13 | 0.62 |
| 20 | 121.9 | 182.8 | 268.2 | 402.2 | 572.9 | 828.8 | -4.01 | 0.31 |
| 25 | 100.0 | 150.0 | 220.0 | 330.0 | 470.0 | 680.0 | -3.90 | 0.00 |
| 30 | 82.49 | 123.7 | 181.5 | 272.2 | 387.7 | 561.0 | -3.80 | 0.30 |
| 35 | 68.41 | 102.6 | 150.5 | 225.8 | 321.5 | 465.2 | -3.69 | 0.58 |
| 40 | 57.02 | 85.54 | 125.5 | 188.2 | 268.0 | 387.8 | -3.59 | 0.86 |
| 45 | 47.77 | 71.65 | 105.1 | 157.6 | 224.5 | 324.8 | -3.50 | 1.13 |
| 50 | 40.20 | 60.30 | 88.44 | 132.7 | 188.9 | 273.3 | -3.40 | 1.39 |
| 55 | 33.98 | 50.98 | 74.76 | 112.1 | 159.7 | 231.1 | -3.31 | 1.64 |
| 60 | 28.86 | 43.28 | 63.48 | 95.23 | 135.6 | 196.2 | -3.23 | 1.88 |
| 65 | 24.61 | 36.91 | 54.13 | 81.20 | 115.6 | 167.3 | -3.15 | 2.12 |
| 70 | 21.07 | 31.60 | 46.35 | 69.52 | 99.01 | 143.3 | -3.07 | 2.35 |
| 75 | 18.11 | 27.16 | 39.84 | 59.76 | 85.11 | 123.1 | -2.99 | 2.57 |
| 80 | 15.62 | 23.43 | 34.37 | 51.56 | 73.43 | 106.2 | -2.91 | 2.79 |
| 85 | 13.53 | 20.29 | 29.76 | 44.65 | 63.59 | 92.00 | -2.84 | 3.00 |
| 90 | 11.76 | 17.63 | 25.86 | 38.80 | 55.26 | 79.95 | -2.77 | 3.21 |
| 95 | 10.25 | 15.38 | 22.55 | 33.83 | 48.18 | 69.71 | -2.71 | 3.41 |
| 100 | 8.968 | 13.45 | 19.73 | 29.59 | 42.15 | 60.98 | -2.64 | 3.60 |
| 105 | 7.871 | 11.81 | 17.32 | 25.97 | 36.99 | 53.52 | -2.58 | 3.79 |
| 110 | 6.928 | 10.39 | 15.24 | 22.86 | 32.56 | 47.11 | -2.52 | 3.97 |
| 115 | 6.117 | 9.176 | 13.46 | 20.19 | 28.75 | 41.60 | -2.46 | 4.15 |
| 120 | 5.416 | 8.125 | 11.92 | 17.87 | 25.46 | 36.83 | -2.41 | 4.33 |
| 125 | 4.809 | 7.214 | 10.58 | 15.87 | 22.60 | 32.70 | -2.35 | 4.50 |
| 130 | 4.282 | 6.422 | 9.419 | 14.13 | 20.12 | 29.11 | -2.30 | 4.66 |
| 135 | 3.822 | 5.732 | 8.408 | 12.61 | 17.96 | 25.99 | -2.25 | 4.83 |
| 140 | 3.420 | 5.130 | 7.523 | 11.29 | 16.07 | 23.25 | -2.20 | 4.99 |
| 145 | 3.068 | 4.601 | 6.749 | 10.12 | 14.42 | 20.86 | -2.15 | 5.14 |
| 150 | 2.758 | 4.137 | 6.068 | 9.102 | 12.96 | 18.76 | -2.10 | 5.29 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (1, 1.5, 2) kΩ | | | | | |
|--|---------------------------------|---------------------------------|---------------------------------|--------------|---------------------------------------|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3102*** | PART NUMBER NTCLE100E3152*** | PART NUMBER NTCLE100E3202*** | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) |
| | R_T (Ω) | R_T (Ω) | R_T (Ω) | | |
| -40 | 23 342 | 35 013 | 46 684 | -6.06 | 1.65 |
| -35 | 17 336 | 26 004 | 34 672 | -5.84 | 1.49 |
| -30 | 13 018 | 19 526 | 26 035 | -5.62 | 1.34 |
| -25 | 9877 | 14 816 | 19 754 | -5.42 | 1.19 |
| -20 | 7569 | 11 353 | 15 138 | -5.23 | 1.05 |
| -15 | 5855 | 8782 | 11 709 | -5.05 | 0.92 |
| -10 | 4569 | 6854 | 9138 | -4.87 | 0.79 |
| -5 | 3596 | 5395 | 7193 | -4.71 | 0.66 |
| 0 | 2854 | 4280 | 5707 | -4.55 | 0.54 |
| 5 | 2282 | 3422 | 4563 | -4.40 | 0.43 |
| 10 | 1838 | 2757 | 3675 | -4.26 | 0.31 |
| 15 | 1491 | 2236 | 2981 | -4.12 | 0.21 |
| 20 | 1217 | 1826 | 2434 | -3.99 | 0.10 |
| 25 | 1000 | 1500 | 2000 | -3.87 | 0.00 |
| 30 | 826.6 | 1240 | 1653 | -3.75 | 0.10 |
| 35 | 687.3 | 1031 | 1375 | -3.63 | 0.19 |
| 40 | 574.6 | 861.9 | 1149 | -3.53 | 0.28 |
| 45 | 482.7 | 724.0 | 965.4 | -3.42 | 0.37 |
| 50 | 407.4 | 611.0 | 814.7 | -3.32 | 0.46 |
| 55 | 345.2 | 517.8 | 690.5 | -3.23 | 0.54 |
| 60 | 293.7 | 440.6 | 587.4 | -3.14 | 0.62 |
| 65 | 250.8 | 376.2 | 501.6 | -3.05 | 0.70 |
| 70 | 214.9 | 322.4 | 429.8 | -2.97 | 0.78 |
| 75 | 184.7 | 277.1 | 369.5 | -2.89 | 0.86 |
| 80 | 159.3 | 238.9 | 318.6 | -2.81 | 0.93 |
| 85 | 137.7 | 206.6 | 275.5 | -2.73 | 1.01 |
| 90 | 119.4 | 179.1 | 238.8 | -2.66 | 1.08 |
| 95 | 103.8 | 155.7 | 207.6 | -2.59 | 1.15 |
| 100 | 90.45 | 135.7 | 180.9 | -2.53 | 1.22 |
| 105 | 79.00 | 118.5 | 158.0 | -2.46 | 1.29 |
| 110 | 69.15 | 103.7 | 138.3 | -2.40 | 1.35 |
| 115 | 60.66 | 90.99 | 121.3 | -2.34 | 1.42 |
| 120 | 53.32 | 79.98 | 106.6 | -2.29 | 1.48 |
| 125 | 46.96 | 70.44 | 93.92 | -2.23 | 1.55 |
| 130 | 41.43 | 62.15 | 82.87 | -2.18 | 1.61 |
| 135 | 36.63 | 54.94 | 73.25 | -2.13 | 1.67 |
| 140 | 32.43 | 48.65 | 64.87 | -2.08 | 1.73 |
| 145 | 28.77 | 43.16 | 57.54 | -2.03 | 1.79 |
| 150 | 25.56 | 38.34 | 51.12 | -1.98 | 1.85 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (2.2, 2.7, 3.3, 4.7, 5.0, 6.8, 10) kΩ | | | | | | | | | |
|---|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------|--|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3222*** | PART NUMBER NTCLE100E3272*** | PART NUMBER NTCLE100E3332*** | PART NUMBER NTCLE100E3472*** | PART NUMBER NTCLE100E3502*** | PART NUMBER NTCLE100E3682*** | PART NUMBER NTCLE100E3103*** | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) |
| | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | R_T (Ω) | | |
| -40 | 73 061 | 89 665 | 109 591 | 156 084 | 166 047 | 225 824 | 332 094 | -6.62 | 2.79 |
| -35 | 52 778 | 64 773 | 79 167 | 112 753 | 119 950 | 163 132 | 239 900 | -6.39 | 2.52 |
| -30 | 38 544 | 47 304 | 57 816 | 82 344 | 87 600 | 119 136 | 175 200 | -6.18 | 2.26 |
| -25 | 28 443 | 34 907 | 42 665 | 60 765 | 64 643 | 87 915 | 129 287 | -5.98 | 2.02 |
| -20 | 21 199 | 26 017 | 31 798 | 45 288 | 48 179 | 65 524 | 96 358 | -5.78 | 1.78 |
| -15 | 15 950 | 19 575 | 23 925 | 34 075 | 36 250 | 49 300 | 72 500 | -5.60 | 1.55 |
| -10 | 12 110 | 14 862 | 18 165 | 25 872 | 27 523 | 37 431 | 55 046 | -5.42 | 1.33 |
| -5 | 9275 | 11 382 | 13 912 | 19 814 | 21 078 | 28 667 | 42 157 | -5.25 | 1.12 |
| 0 | 7162 | 8790 | 10 743 | 15 300 | 16 277 | 22 137 | 32 554 | -5.09 | 0.92 |
| 5 | 5574 | 6841 | 8362 | 11 909 | 12 669 | 17 230 | 25 339 | -4.93 | 0.72 |
| 10 | 4372 | 5365 | 6558 | 9340 | 9936 | 13 513 | 19 872 | -4.79 | 0.53 |
| 15 | 3454 | 4239 | 5180 | 7378 | 7849 | 10 675 | 15 698 | -4.64 | 0.35 |
| 20 | 2747 | 3372 | 4121 | 5869 | 6244 | 8492 | 12 488 | -4.51 | 0.17 |
| 25 | 2200 | 2700 | 3300 | 4700 | 5000 | 6800 | 10 000 | -4.38 | 0.00 |
| 30 | 1773 | 2176 | 2659 | 3788 | 4030 | 5480 | 8059 | -4.25 | 0.17 |
| 35 | 1438 | 1764 | 2156 | 3071 | 3267 | 4444 | 6535 | -4.13 | 0.32 |
| 40 | 1173 | 1439 | 1759 | 2505 | 2665 | 3624 | 5330 | -4.02 | 0.48 |
| 45 | 961.8 | 1180 | 1443 | 2055 | 2186 | 2973 | 4372 | -3.91 | 0.63 |
| 50 | 793.2 | 973.4 | 1190 | 1694 | 1803 | 2452 | 3605 | -3.80 | 0.77 |
| 55 | 657.5 | 806.9 | 986.3 | 1405 | 1494 | 2032 | 2989 | -3.70 | 0.91 |
| 60 | 547.8 | 672.3 | 821.7 | 1170 | 1245 | 1693 | 2490 | -3.60 | 1.05 |
| 65 | 458.6 | 562.8 | 687.9 | 979.7 | 1042 | 1417 | 2084 | -3.51 | 1.18 |
| 70 | 385.7 | 473.3 | 578.5 | 823.9 | 876.5 | 1192 | 1753 | -3.42 | 1.31 |
| 75 | 325.8 | 399.8 | 488.7 | 696.0 | 740.5 | 1007 | 1481 | -3.33 | 1.44 |
| 80 | 276.4 | 339.2 | 414.6 | 590.5 | 628.2 | 854.3 | 1256 | -3.25 | 1.56 |
| 85 | 235.5 | 289.0 | 353.2 | 503.0 | 535.2 | 727.8 | 1070 | -3.17 | 1.68 |
| 90 | 201.4 | 247.2 | 302.1 | 430.2 | 457.7 | 622.5 | 915.4 | -3.09 | 1.79 |
| 95 | 172.9 | 212.2 | 259.4 | 369.4 | 393.0 | 534.5 | 786.0 | -3.01 | 1.90 |
| 100 | 149.0 | 182.9 | 223.5 | 318.3 | 338.6 | 460.6 | 677.3 | -2.94 | 2.01 |
| 105 | 128.9 | 158.2 | 193.3 | 275.3 | 292.9 | 398.3 | 585.7 | -2.87 | 2.12 |
| 110 | 111.8 | 137.2 | 167.7 | 238.9 | 254.2 | 345.7 | 508.3 | -2.80 | 2.22 |
| 115 | 97.37 | 119.5 | 146.1 | 208.0 | 221.3 | 301.0 | 442.6 | -2.74 | 2.32 |
| 120 | 85.05 | 104.4 | 127.6 | 181.7 | 193.3 | 262.9 | 386.6 | -2.67 | 2.42 |
| 125 | 74.52 | 91.46 | 111.8 | 159.2 | 169.4 | 230.3 | 338.7 | -2.61 | 2.51 |
| 130 | 65.49 | 80.38 | 98.24 | 139.9 | 148.8 | 202.4 | 297.7 | -2.55 | 2.61 |
| 135 | 57.72 | 70.84 | 86.59 | 123.3 | 131.2 | 178.4 | 262.4 | -2.50 | 2.70 |
| 140 | 51.02 | 62.62 | 76.53 | 109.0 | 116.0 | 157.7 | 231.9 | -2.44 | 2.78 |
| 145 | 45.22 | 55.49 | 67.83 | 96.60 | 102.8 | 139.8 | 205.5 | -2.39 | 2.87 |
| 150 | 40.18 | 49.31 | 60.27 | 85.84 | 91.32 | 124.2 | 182.6 | -2.34 | 2.96 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (12, 15, 22) kΩ | | | | | |
|---|---------------------------------|---------------------------------|---------------------------------|--------------|--------------------------------------|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3123*** | PART NUMBER NTCLE100E3153*** | PART NUMBER NTCLE100E3223*** | TCR (%/K) | $\Delta R/R$ DUE TO B_{tol} (%) |
| | R_T (k Ω) | R_T (k Ω) | R_T (k Ω) | | |
| -40 | 309.4 | 386.7 | 567.2 | -6.07 | 7.00 |
| -35 | 229.5 | 286.9 | 420.8 | -5.88 | 6.32 |
| -30 | 171.8 | 214.8 | 315.0 | -5.70 | 5.68 |
| -25 | 129.8 | 162.3 | 238.0 | -5.52 | 5.06 |
| -20 | 98.93 | 123.7 | 181.4 | -5.35 | 4.46 |
| -15 | 76.02 | 95.02 | 139.4 | -5.19 | 3.89 |
| -10 | 58.88 | 73.60 | 107.9 | -5.03 | 3.34 |
| -5 | 45.95 | 57.44 | 84.25 | -4.88 | 2.81 |
| 0 | 36.13 | 45.16 | 66.24 | -4.74 | 2.30 |
| 5 | 28.61 | 35.76 | 52.45 | -4.60 | 1.80 |
| 10 | 22.80 | 28.51 | 41.81 | -4.47 | 1.33 |
| 15 | 18.30 | 22.87 | 33.55 | -4.34 | 0.87 |
| 20 | 14.77 | 18.47 | 27.08 | -4.22 | 0.43 |
| 25 | 12.00 | 15.00 | 22.00 | -4.10 | 0.00 |
| 30 | 9.804 | 12.25 | 17.97 | -3.99 | 0.41 |
| 35 | 8.054 | 10.07 | 14.77 | -3.88 | 0.81 |
| 40 | 6.652 | 8.315 | 12.20 | -3.77 | 1.20 |
| 45 | 5.522 | 6.903 | 10.12 | -3.67 | 1.58 |
| 50 | 4.607 | 5.759 | 8.447 | -3.58 | 1.94 |
| 55 | 3.862 | 4.828 | 7.081 | -3.48 | 2.29 |
| 60 | 3.252 | 4.066 | 5.963 | -3.39 | 2.64 |
| 65 | 2.751 | 3.439 | 5.044 | -3.30 | 2.97 |
| 70 | 2.337 | 2.921 | 4.284 | -3.22 | 3.29 |
| 75 | 1.993 | 2.492 | 3.654 | -3.14 | 3.60 |
| 80 | 1.707 | 2.134 | 3.129 | -3.06 | 3.91 |
| 85 | 1.467 | 1.834 | 2.690 | -2.99 | 4.20 |
| 90 | 1.266 | 1.582 | 2.321 | -2.92 | 4.49 |
| 95 | 1.096 | 1.370 | 2.010 | -2.85 | 4.77 |
| 100 | 0.9524 | 1.190 | 1.746 | -2.78 | 5.04 |
| 105 | 0.8302 | 1.038 | 1.522 | -2.71 | 5.31 |
| 110 | 0.7260 | 0.9075 | 1.331 | -2.65 | 5.56 |
| 115 | 0.6369 | 0.7961 | 1.168 | -2.59 | 5.82 |
| 120 | 0.5604 | 0.7005 | 1.027 | -2.53 | 6.06 |
| 125 | 0.4945 | 0.6181 | 0.9065 | -2.47 | 6.30 |
| 130 | 0.4375 | 0.5469 | 0.8022 | -2.42 | 6.53 |
| 135 | 0.3882 | 0.4853 | 0.7117 | -2.37 | 6.76 |
| 140 | 0.3454 | 0.4317 | 0.6332 | -2.31 | 6.98 |
| 145 | 0.3080 | 0.3850 | 0.5647 | -2.26 | 7.20 |
| 150 | 0.2754 | 0.3442 | 0.5049 | -2.22 | 7.41 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/

| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R₂₅ AT (33, 47, 50, 68, 100) kΩ | | | | | | | | | |
|---|---------------------------|------------------------|--------------|---|------------------------|------------------------|------------------------|--------------|---|
| T _{OPER} (°C) | PART NUMBER NTCLE100E3 | | | | | | | | |
| | 333*** | 473*** | TCR (%/K) | ΔR/R DUE TO B _{tol.} (%) | 503*** | 683*** | 104*** | TCR (%/K) | ΔR/R DUE TO B _{tol.} (%) |
| | R _T (kΩ) | R _T (kΩ) | | | R _T (kΩ) | R _T (kΩ) | R _T (kΩ) | | |
| -40 | 1116 | 1589 | -6.54 | 5.74 | 1833 | 2493 | 3666 | -6.69 | 5.88 |
| -35 | 808.6 | 1152 | -6.34 | 5.19 | 1319 | 1794 | 2638 | -6.49 | 5.31 |
| -30 | 591.7 | 842.8 | -6.15 | 4.66 | 958.3 | 1303 | 1917 | -6.29 | 4.77 |
| -25 | 437.1 | 622.6 | -5.96 | 4.15 | 703.1 | 956.2 | 1406 | -6.10 | 4.25 |
| -20 | 325.9 | 464.1 | -5.79 | 3.66 | 520.6 | 708.0 | 1041 | -5.92 | 3.75 |
| -15 | 245.0 | 349.0 | -5.62 | 3.19 | 388.9 | 528.9 | 777.8 | -5.75 | 3.27 |
| -10 | 185.8 | 264.6 | -5.45 | 2.74 | 293.0 | 398.5 | 586.1 | -5.58 | 2.80 |
| -5 | 142.0 | 202.3 | -5.30 | 2.30 | 222.6 | 302.8 | 445.3 | -5.42 | 2.36 |
| 0 | 109.4 | 155.8 | -5.14 | 1.88 | 170.5 | 231.8 | 340.9 | -5.26 | 1.93 |
| 5 | 84.91 | 120.9 | -5.00 | 1.48 | 131.5 | 178.9 | 263.1 | -5.11 | 1.52 |
| 10 | 66.37 | 94.53 | -4.86 | 1.09 | 102.2 | 139.0 | 204.4 | -4.97 | 1.12 |
| 15 | 52.24 | 74.40 | -4.72 | 0.71 | 80.01 | 108.8 | 160.0 | -4.83 | 0.73 |
| 20 | 41.39 | 58.95 | -4.59 | 0.35 | 63.04 | 85.74 | 126.1 | -4.70 | 0.36 |
| 25 | 33.00 | 47.00 | -4.47 | 0.00 | 50.00 | 68.00 | 100.0 | -4.57 | 0.00 |
| 30 | 26.47 | 37.71 | -4.35 | 0.34 | 39.90 | 54.27 | 79.81 | -4.45 | 0.35 |
| 35 | 21.37 | 30.43 | -4.23 | 0.67 | 32.04 | 43.57 | 64.08 | -4.33 | 0.68 |
| 40 | 17.34 | 24.70 | -4.12 | 0.99 | 25.87 | 35.19 | 51.75 | -4.22 | 1.01 |
| 45 | 14.15 | 20.15 | -4.01 | 1.29 | 21.01 | 28.57 | 42.02 | -4.11 | 1.33 |
| 50 | 11.61 | 16.53 | -3.91 | 1.59 | 17.15 | 23.33 | 34.31 | -4.00 | 1.63 |
| 55 | 9.572 | 13.63 | -3.81 | 1.88 | 14.08 | 19.15 | 28.16 | -3.90 | 1.93 |
| 60 | 7.931 | 11.30 | -3.71 | 2.16 | 11.61 | 15.79 | 23.22 | -3.80 | 2.21 |
| 65 | 6.603 | 9.404 | -3.62 | 2.43 | 9.623 | 13.09 | 19.25 | -3.71 | 2.49 |
| 70 | 5.522 | 7.865 | -3.53 | 2.70 | 8.012 | 10.90 | 16.02 | -3.62 | 2.76 |
| 75 | 4.639 | 6.607 | -3.44 | 2.95 | 6.701 | 9.114 | 13.40 | -3.53 | 3.03 |
| 80 | 3.913 | 5.573 | -3.36 | 3.20 | 5.629 | 7.655 | 11.26 | -3.45 | 3.28 |
| 85 | 3.315 | 4.721 | -3.28 | 3.45 | 4.748 | 6.457 | 9.496 | -3.36 | 3.53 |
| 90 | 2.819 | 4.015 | -3.20 | 3.68 | 4.021 | 5.469 | 8.042 | -3.28 | 3.77 |
| 95 | 2.406 | 3.427 | -3.13 | 3.91 | 3.419 | 4.649 | 6.837 | -3.21 | 4.01 |
| 100 | 2.062 | 2.936 | -3.05 | 4.13 | 2.918 | 3.968 | 5.835 | -3.13 | 4.24 |
| 105 | 1.773 | 2.525 | -2.98 | 4.35 | 2.499 | 3.399 | 4.998 | -3.06 | 4.46 |
| 110 | 1.530 | 2.179 | -2.92 | 4.56 | 2.148 | 2.921 | 4.296 | -2.99 | 4.68 |
| 115 | 1.324 | 1.886 | -2.85 | 4.77 | 1.853 | 2.519 | 3.705 | -2.93 | 4.89 |
| 120 | 1.150 | 1.638 | -2.79 | 4.97 | 1.603 | 2.180 | 3.206 | -2.86 | 5.09 |
| 125 | 1.002 | 1.427 | -2.73 | 5.17 | 1.392 | 1.892 | 2.783 | -2.80 | 5.29 |
| 130 | 0.8757 | 1.247 | -2.67 | 5.36 | 1.212 | 1.648 | 2.423 | -2.74 | 5.49 |
| 135 | 0.7675 | 1.093 | -2.61 | 5.54 | 1.058 | 1.439 | 2.116 | -2.68 | 5.68 |
| 140 | 0.6746 | 0.9608 | -2.55 | 5.73 | 0.9269 | 1.261 | 1.854 | -2.62 | 5.87 |
| 145 | 0.5946 | 0.8468 | -2.50 | 5.90 | 0.8141 | 1.107 | 1.628 | -2.57 | 6.05 |
| 150 | 0.5254 | 0.7483 | -2.45 | 6.08 | 0.7170 | 0.9752 | 1.434 | -2.51 | 6.23 |



For complete Curve Computation, visit: www.vishay.com/thermistors/ntc-curve-list/


| RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH R_{25} AT (150, 220, 330, 470) k Ω | | | | | | | | |
|---|---------------------------|------------------------|--------------|--|------------------------|------------------------|--------------|--|
| T_{OPER} (°C) | PART NUMBER NTCLE100E3 | | | | | | | |
| | 154*** | 224*** | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) | 334*** | 474*** | TCR (%/K) | $\Delta R/R$ DUE TO $B_{tol.}$ (%) |
| | R_T (k Ω) | R_T (k Ω) | | | R_T (k Ω) | R_T (k Ω) | | |
| -40 | 6153 | 9024 | -6.83 | 10.22 | 16 044 | 22 850 | -7.14 | 6.41 |
| -35 | 4394 | 6444 | -6.64 | 9.24 | 11 282 | 16 068 | -6.94 | 5.80 |
| -30 | 3168 | 4646 | -6.45 | 8.29 | 8013 | 11 413 | -6.74 | 5.20 |
| -25 | 2305 | 3381 | -6.27 | 7.39 | 5747 | 8185 | -6.55 | 4.64 |
| -20 | 1693 | 2483 | -6.09 | 6.52 | 4161 | 5926 | -6.37 | 4.09 |
| -15 | 1254 | 1839 | -5.92 | 5.68 | 3040 | 4329 | -6.19 | 3.57 |
| -10 | 936.4 | 1373 | -5.75 | 4.88 | 2240 | 3190 | -6.02 | 3.06 |
| -5 | 705.0 | 1034 | -5.60 | 4.10 | 1665 | 2371 | -5.85 | 2.57 |
| 0 | 535.0 | 784.7 | -5.44 | 3.36 | 1248 | 1777 | -5.69 | 2.11 |
| 5 | 409.1 | 600.0 | -5.29 | 2.64 | 942.3 | 1342 | -5.54 | 1.65 |
| 10 | 315.1 | 462.1 | -5.15 | 1.94 | 717.1 | 1021 | -5.39 | 1.22 |
| 15 | 244.4 | 358.4 | -5.01 | 1.27 | 549.8 | 783.0 | -5.24 | 0.80 |
| 20 | 190.8 | 279.9 | -4.88 | 0.63 | 424.5 | 604.6 | -5.10 | 0.39 |
| 25 | 150.0 | 220.0 | -4.75 | 0.00 | 330.0 | 470.0 | -4.97 | 0.00 |
| 30 | 118.6 | 174.0 | -4.63 | 0.60 | 258.2 | 367.8 | -4.84 | 0.38 |
| 35 | 94.42 | 138.5 | -4.51 | 1.19 | 203.4 | 289.6 | -4.72 | 0.75 |
| 40 | 75.58 | 110.9 | -4.39 | 1.76 | 161.1 | 229.5 | -4.59 | 1.10 |
| 45 | 60.85 | 89.24 | -4.28 | 2.30 | 128.4 | 182.9 | -4.48 | 1.45 |
| 50 | 49.25 | 72.24 | -4.17 | 2.83 | 103.0 | 146.7 | -4.37 | 1.78 |
| 55 | 40.08 | 58.78 | -4.07 | 3.35 | 83.00 | 118.2 | -4.26 | 2.10 |
| 60 | 32.78 | 48.08 | -3.97 | 3.85 | 67.26 | 95.80 | -4.15 | 2.41 |
| 65 | 26.94 | 39.51 | -3.87 | 4.33 | 54.79 | 78.04 | -4.05 | 2.72 |
| 70 | 22.25 | 32.63 | -3.78 | 4.80 | 44.85 | 63.88 | -3.95 | 3.01 |
| 75 | 18.46 | 27.07 | -3.69 | 5.26 | 36.90 | 52.55 | -3.86 | 3.30 |
| 80 | 15.38 | 22.56 | -3.60 | 5.70 | 30.49 | 43.43 | -3.77 | 3.58 |
| 85 | 12.87 | 18.88 | -3.52 | 6.14 | 25.31 | 36.05 | -3.68 | 3.85 |
| 90 | 10.82 | 15.87 | -3.44 | 6.56 | 21.10 | 30.06 | -3.59 | 4.11 |
| 95 | 9.129 | 13.39 | -3.36 | 6.96 | 17.67 | 25.16 | -3.51 | 4.37 |
| 100 | 7.732 | 11.34 | -3.28 | 7.36 | 14.85 | 21.15 | -3.43 | 4.62 |
| 105 | 6.574 | 9.642 | -3.21 | 7.75 | 12.53 | 17.85 | -3.35 | 4.86 |
| 110 | 5.610 | 8.228 | -3.14 | 8.13 | 10.62 | 15.12 | -3.28 | 5.10 |
| 115 | 4.804 | 7.046 | -3.07 | 8.49 | 9.029 | 12.86 | -3.21 | 5.33 |
| 120 | 4.128 | 6.054 | -3.00 | 8.85 | 7.704 | 10.97 | -3.14 | 5.55 |
| 125 | 3.559 | 5.219 | -2.94 | 9.20 | 6.597 | 9.396 | -3.07 | 5.77 |
| 130 | 3.078 | 4.514 | -2.87 | 9.54 | 5.668 | 8.072 | -3.00 | 5.99 |
| 135 | 2.670 | 3.916 | -2.81 | 9.87 | 4.885 | 6.958 | -2.94 | 6.20 |
| 140 | 2.323 | 3.408 | -2.75 | 10.20 | 4.224 | 6.016 | -2.88 | 6.40 |
| 145 | 2.028 | 2.974 | -2.69 | 10.52 | 3.663 | 5.217 | -2.82 | 6.60 |
| 150 | 1.774 | 2.603 | -2.64 | 10.83 | 3.186 | 4.538 | -2.76 | 6.79 |

**PACKAGING
TAPE SPECIFICATIONS**

Thermistors on tape


1E pitch
 NTCLE100E3....T1

| DIMENSIONS in millimeters | | | | |
|--|----------------|--------------------|----------------|--|
| DETAILS | SYMBOL | DIMENSIONS NOMINAL | TOLERANCE | REMARKS |
| Body diameter | D | 3.3 | ± 0.5 | 5 max. for 3.3 Ω to 220 Ω |
| Lead diameter | d | 0.6 | ± 0.06 | |
| Feed hole diameter | D ₀ | 4.0 | ± 0.2 | |
| Lead to lead distance | F | 2.5 | +0.5 -0.2 | Guaranteed between component and tape |
| Distance component to tape center | H | 22.0 | ± 1.0 | 1 to 4 max. for 3.3 Ω to 220 Ω |
| Component height | H ₁ | 32.2 | max. | |
| Component alignment | Δh | 0 | ± 2.0 | |
| Distance top/bottom of components | H ₂ | 6 | max. | |
| Length of lacquer under the comp. bottom | H ₃ | 2 | ± 1 | |
| Length of snipped lead | L | 11.0 | max. | |
| Pitch between thermistors | P | 12.7 | ± 1.0 | Cumulative pitch error ± 1 mm / 20 pitches guaranteed between component and tape |
| Feed hole pitch | P ₀ | 12.7 | ± 0.3 | |
| Feed hole center to lead center | P ₁ | 5.08 | ± 0.7 | |
| Component alignment | Δp | 0 | ± 1.3 | |
| Total thickness | T | 3.0 | max. | 4 max. for 3.3 Ω to 220 Ω with cardboard tape 0.5 ± 0.1 |
| Total tape thickness | t | 0.9 | max. | |
| Tape width | W | 18.0 | ± 1.0 - 0.5 | None of the hold down tapes may cover the holes |
| Hold down tape width | W ₀ | 5.0 | ± 0.3 | |
| Hole position | W ₁ | 9.0 | ± 0.5 | |
| Hold down tape position | W ₂ | 1.5 | ± 1.0 | |

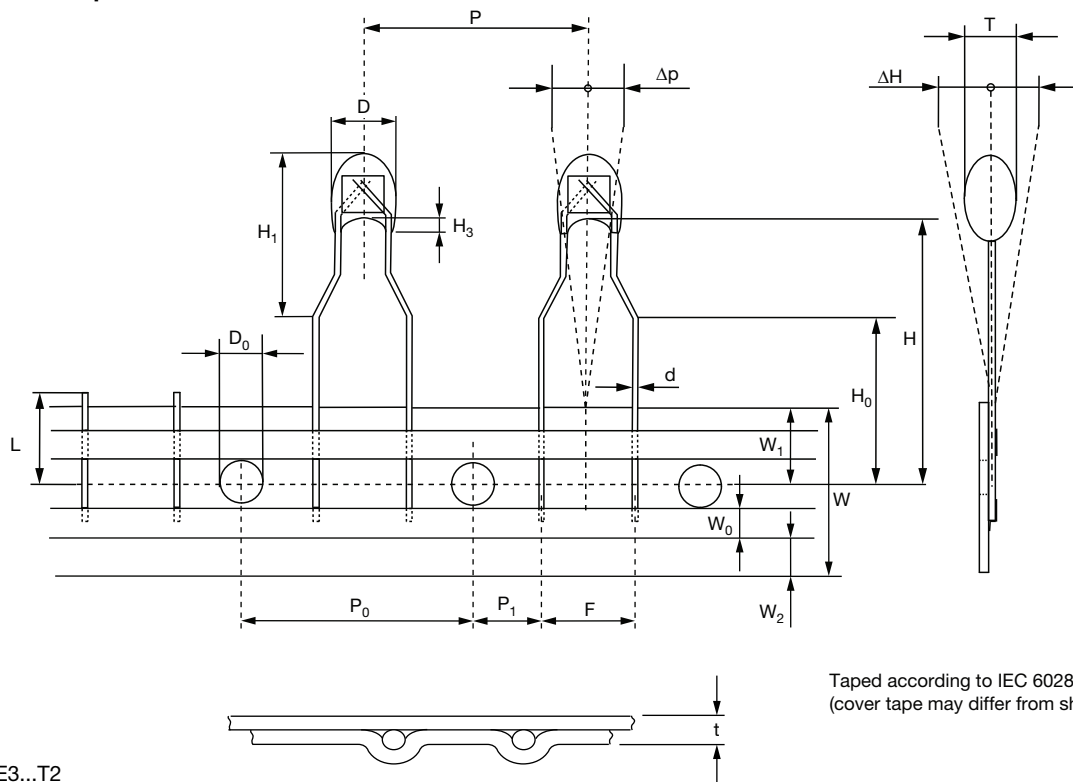Thermistors on tape


2E pitch
NTCLE100E3...T2

| DIMENSIONS in millimeters | | | | |
|--|----------------|--------------------|----------------|--|
| DETAILS | SYMBOL | DIMENSIONS NOMINAL | TOLERANCE | REMARKS |
| Body diameter | D | 3.3 | ± 0.5 | 5 max. for 3.3 Ω to 220 Ω |
| Lead diameter | d | 0.6 | ± 0.06 | |
| Feed hole diameter | D ₀ | 4.0 | ± 0.2 | |
| Lead to lead distance | F | 5.0 | +0.5 -0.2 | Guaranteed between component and tape |
| Distance component to tape center | H | 20.0 | ± 2.0 | 12 max. for 100 Ω to 220 Ω |
| Component height | H ₀ | 16.0 | ± 0.5 | |
| Component alignment | H ₁ | 10.0 | max. | |
| Distance top/bottom of components | Δh | 0.0 | ± 2.0 | |
| Length of lacquer under the comp. bottom | H ₃ | 2.0 | ± 1.0 | |
| Length of snapped lead | L | 11.0 | max. | |
| Pitch between thermistors | P | 12.7 | ± 1.0 | Cumulative pitch error ± 1 mm / 20 pitches guaranteed between component and tape |
| Feed hole pitch | P ₀ | 12.7 | ± 0.3 | |
| Feed hole center to lead center | P ₁ | 3.81 | ± 0.7 | |
| Component alignment | Δp | 0.0 | ± 1.3 | |
| Total thickness | T | 3.0 | max. | 4 max. for 3.3 Ω to 220 Ω with cardboard tape 0.5 ± 0.1 |
| Total tape thickness | t | 0.9 | max. | |
| Tape width | W | 18.0 | ± 1.0 - 0.5 | None of the hold down tapes may cover the holes |
| Hold down tape width | W ₀ | 5.0 | ± 0.3 | |
| Hole position | W ₁ | 9.0 | ± 0.5 | |
| Hold down tape position | W ₂ | 1.5 | ± 1.0 | |

REEL SPECIFICATIONS

PART NUMBERS AND PACKAGING

| PACKING METHOD | PART NUMBERS | QUANTITY |
|---------------------------|---------------------|-----------------------------------|
| Bulk | NTCLE100E3....B0(A) | 500 |
| Tape and reel 1E pitch | NTCLE100E3....T1(A) | 1500 per reel, 2 reels per box |
| Tape and reel 2E pitch | NTCLE100E3....T2(A) | 1500 per reel, 2 reels per box |

CHARACTERISTICS OF TAPED PRODUCTS

Minimum pull-out force of the component: 5 N

Minimum peel-off force of adhesive tape: 6 N

Minimum tearing force tape: 15 N

Minimum pull-off force of tape-reel: 5 N

STORAGE CONDITIONS

Storage temperature range: - 25 °C to + 40 °C

Maximum relative humidity: 80 %, non-condensing

TESTS AND REQUIREMENTS

Tests are carried out in accordance with IEC 60068-2 and IEC 60539-1.

| STABILITY TESTS | | | |
|----------------------------|---|--|--|
| IEC 60068-2 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS |
| | Endurance | 25 °C; 1000 h | $\Delta R/R < 1 \%$ |
| 1 | Endurance | -40 °C; 1000 h | $\Delta R/R < 1 \%$ |
| 60539 (5.25.4) | Endurance | 500 mW; 55 °C; 1000 h | $\Delta R/R < 3 \%$ ⁽¹⁾ |
| 2 | Dry heat, (steady state) | 125 °C; 1000 h | $\Delta R/R < 3 \%$ |
| 78 | Damp heat (steady state) | 56 days at 40 °C; 90 % to 95 % RH | $\Delta R/R < 3 \%$ |
| 14 | Rapid change of temperature | -40 °C to +125 °C; 50 cycles | $\Delta R/R < 2 \%$ |
| Other applicable tests | | | |
| 21 | Robustness of leads: Tensile strength Bending | Loading force 10 N Loading force 5 N | $\Delta R/R \leq 1 \%$ |
| 58 | Soldering: Solderability Resistance to heat | 240 °C max.; duration 4 s max. 265 °C max.; duration 5 s max. | $\Delta R/R \leq 1 \%$ ⁽²⁾ |
| 27 | Impact | Free fall; 1 m | $\Delta R/R \leq 1 \%$ |
| 29 | Shock | 490 m/s; half sinewave | $\Delta R/R \leq 1 \%$ |
| 45 | Resistance to solvent (isopropanol) | Ambient temp for 5 minutes; 5 N with hydrophilic cotton wool | No traces of lacquer on cotton wool |
| 6 | Vibration | 1.5 mm peak to peak: 10 Hz to 58 Hz 10 g: 50 Hz to 500 Hz 1 octave/min. 2 h in each direction in three orthogonal directions | No visible damage $\Delta R/R < 1 \%$ |
| 60695-2-2 | Inflammability | 1980, needle flame test | Non-flammable |

Notes
⁽¹⁾ For $R_{25} \geq 100 \text{ k}\Omega$ the drift requirement is $\Delta R/R < 5 \%$
⁽²⁾ For R_{25} from 2.2 k Ω to 10 k Ω , requirement is $\pm 2 \%$ max.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.