

JLC1562B


I²C Bus I/O Expander

The JLC1562B facilitates easy I²C Bus expandability. Multiple devices (up to 8 on the same I²C Bus) are easily added as each device has its own selectable 3-bit address. The JLC1562B provides an 8-bit bidirectional input/output port and 6-bit resolution Digital to Analog Converter. The voltage on pins P0–P4 is compared with a controllable threshold voltage and the results are readable through the I²C Bus.

I²C Bus interface pins SDA, SCL and A0–A2 are; Serial Data, Serial Clock and Device Address respectively. External interface pins are P0–P7 and VDAC; I/O Port and D/A output.

Features

- Low Power Dissipation
- I²C-Bus Format (2-Wire Type; SDA, SCL) Data Transfer
- 6-bit DAC
- Bus Address Selectable (3-bit)
- Address Input Pins are Pulled Up to V_{DD} with Internal Resistor
- I/O Pins are Open Drain Outputs
- 5 Comparators at Inputs
- Inputs Protected from External Bus Currents in Power Down Mode

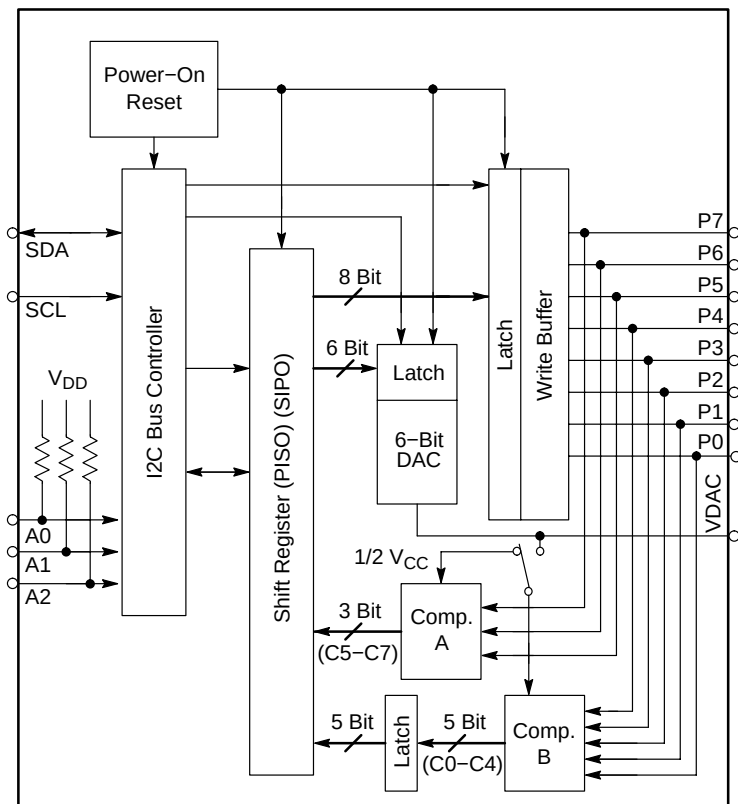

NOTE: Internal Power On Reset sets P0 ~ P7 low, sets VDAC to 1/80 V_{DD} and selects 1/2 V_{DD} for Comparator "B" threshold.


Figure 1. Block Diagram




ON Semiconductor®

<http://onsemi.com>



MARKING DIAGRAMS




PDIP-16
N SUFFIX
CASE 648



EIAJ-16
F SUFFIX
CASE 966



QFN-16
CASE 485D



A = Assembly Location
WL, L = Wafer Lot
YY, Y = Year
WW, W = Work Week

ORDERING INFORMATION

Device	Package	Shipping [†]
JLC1562BN	PDIP-16	500 / Unit PAK
JLC1562BF	EIAJ-16	50 Units / Rail
JLC1562BFEL	EIAJ-16	2000 Units / Reel
JLC1562MNR2	QFN-16	3000 Units / Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

JLC1562B


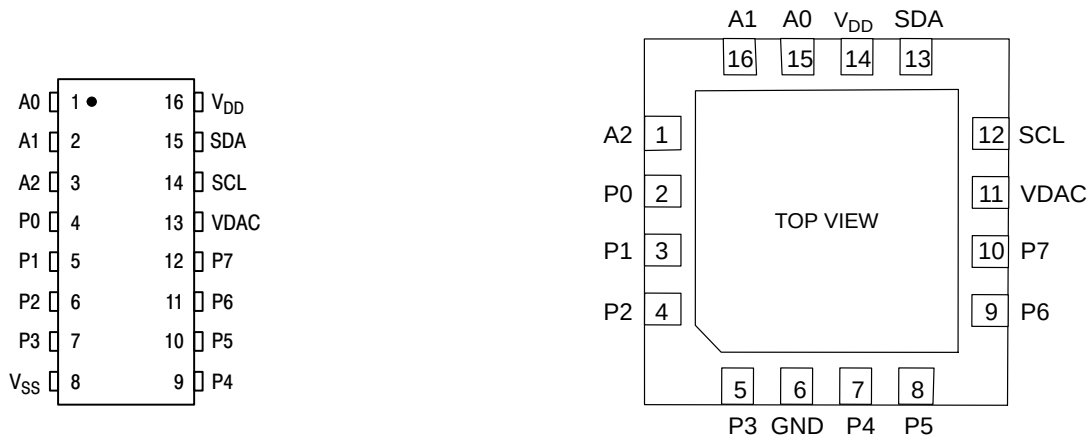


Figure 2. PIN ASSIGNMENT

Figure 3. PIN ASSIGNMENT (QFN-16)


PIN LIST	
A0-A2	Chip Address Input
P0-P4	Comparator Input / Open Drain Output
P5-P7	Comparator Input / Open Drain Output
SCL	Serial Clock Input
SDA	I ² C Data Output
VDAC	DAC Output

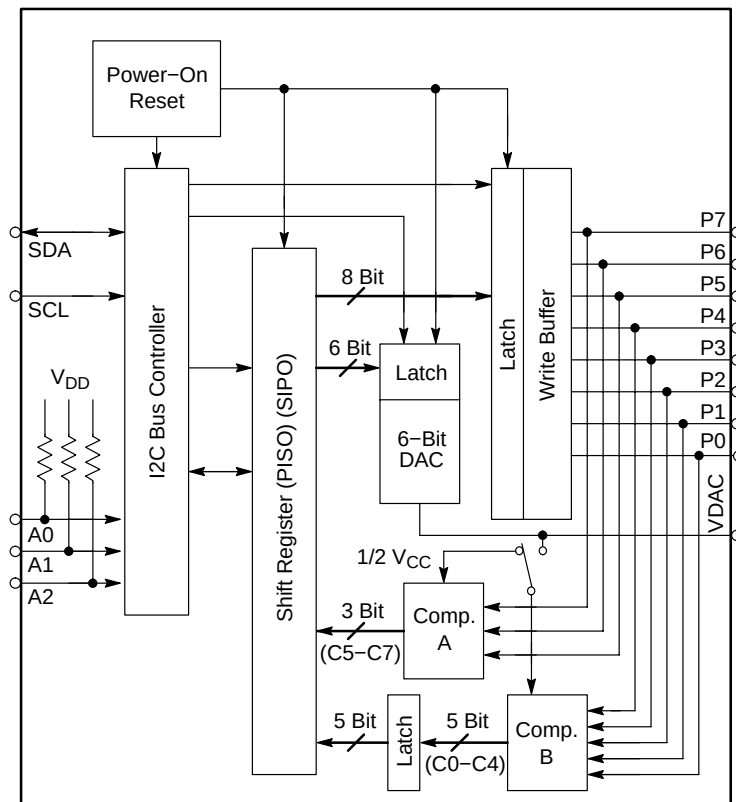

NOTE: Internal Power On Reset sets P0 ~ P7 low, sets VDAC to 1/80 V_{DD} and selects 1/2 V_{DD} for Comparator "B" threshold.

Figure 4. Block Diagram

JLC1562B

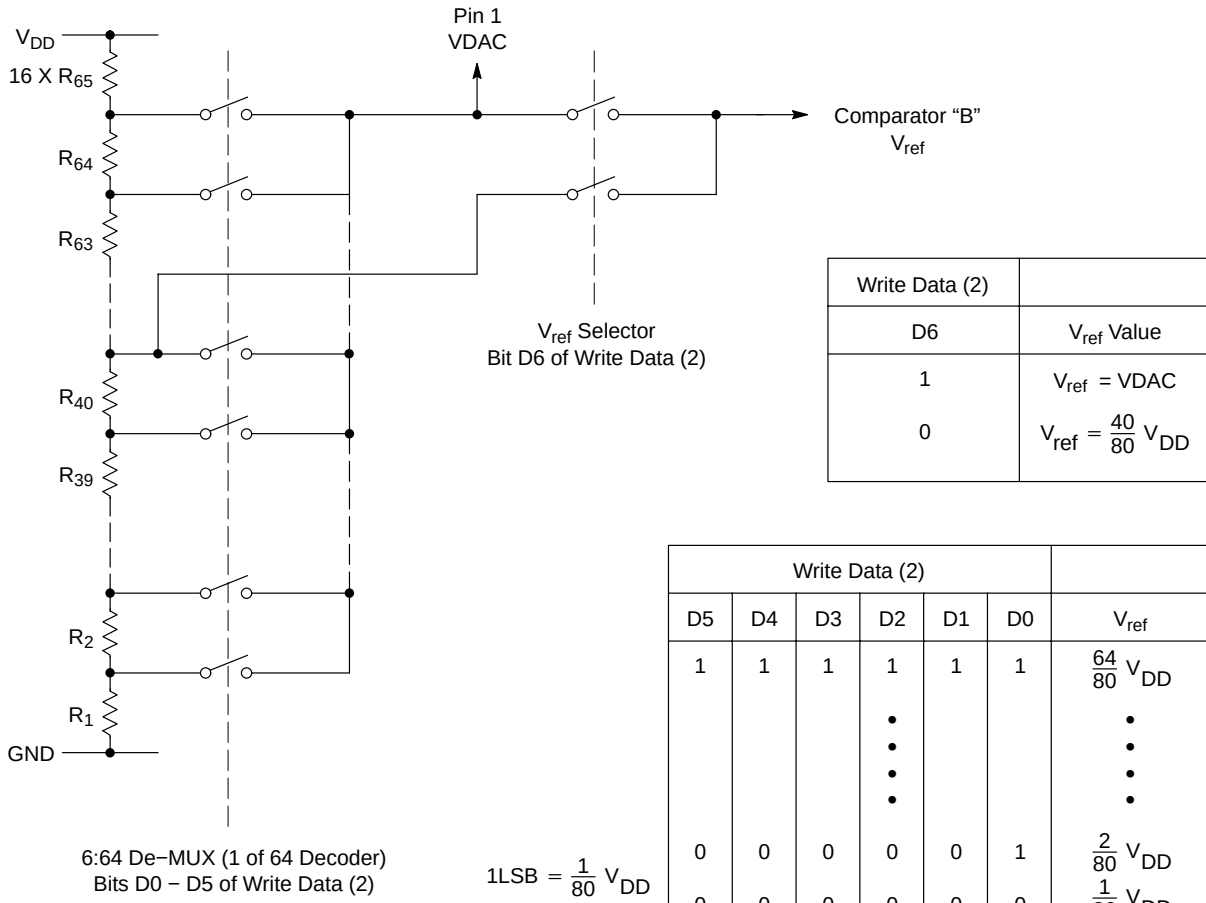

MAXIMUM RATINGS (Referenced to GND)

Symbol	Parameter	Value	Unit
V _{dd}	DC Supply Voltage	– 0.5 to + 7.0	V
V _{in}	DC Input Voltage	– 0.5 to V _{dd} + 0.5	V
V _{out}	DC Output Voltage	– 0.5 to V _{dd} + 0.5	V
I	DC Input/Output Current (per Pin)	25	mA
I _{DD}	DC Supply Current (V _{DD} and GND Pins)	75	mA
T _{stg}	Storage Temperature Range	– 65 to + 150	°C
T _L	Lead Temperature, 1 mm from Case for 10 Seconds	300	°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V _{dd}	DC Supply Voltage	4.2	6.0	V
V _{in} , V _{out}	DC Input Voltage	0.0	V _{dd}	V
T _A	Operating Temperature	– 40	+ 85	°C

JLC1562B

DC CHARACTERISTICS (Referenced to V_{SS})

Symbol	Parameter	Guaranteed Limit		Unit
		Min	Max	
V_{IH}	Maximum Input Voltage, "H"	$0.7 V_{dd}$	–	V
V_{IL}	Maximum Input Voltage, "L"	–	$0.3 V_{dd}$	V
V_{OL}	Maximum Output Voltage, "L" ($I_{out} = 4mA$)	–	0.3	V
I_{in}	Maximum Input Leakage Current ($V_{in} = V_{dd}$ or V_{SS} , SCL pin only)	–	± 1.0	μA
I_{oz}	Maximum Output Hi-Z Leakage Current (Output = High Impedance; $V_{out} = V_{dd}$)	–	± 5.0	μA
C_{in}	Maximum Input Capacitance (Input Pin)	–	10	pF
C_{out}	Maximum Output Capacitance (Output Pin)	–	15	pF
$C_{i/o}$	Maximum I/O Capacitance (I/O Pin)	–	15	pF
V_{ICR}	Comparator Common Mode Input Voltage Range	0	$V_{dd} - 1.5$	V
I_{CC}	Maximum Quiescent Supply Current (per Package)	–	5.0	mA

COMPARATOR AC CHARACTERISTICS


Symbol	Parameter	Test Conditions	Guaranteed Limit			Unit
			Min	Typ	Max	
t_{PD}	Maximum Propagation Delay	$V_{ref} = 1.5V$, 10mV overdrive	–	1.0	–	μS
		$V_{ref} = 1.5V$, 100mV overdrive	–	0.2	–	μS

DA COMPARATOR CHARACTERISTICS

Symbol	Parameter	Guaranteed Limit			Unit
		Min	Typ	Max	
DNL	DAC Referential NON-Linearity		$\pm 1/4$ LSB		
e_{FS}	DAC Full Scale Error			± 1 LSB	
e_{ZC}	DAC Zero Scale Error			± 1 LSB	

TIMING CHARACTERISTICS


Symbol	Parameter	Guaranteed Limit		Unit
		Min	Max	
f_{CL}	SCL CLOCK Frequency	0	100	kHz
t_{BUF}	BUS Free Time (Between "STOP" and "START")	4.7	–	μS
$t_{HD:STA}$	HOLD Time for "START"	4.0	–	μS
t_{LOW}	HOLD Time at SCL CLOCK LOW	4.7	–	μS
t_{HIGH}	HOLD Time at SCL CLOCK HI	4.0	–	μS
$t_{HD:DAT}$	DATA HOLD Time	0	–	μS
$t_{SU:DAT}$	DATA SETUP Time	250	–	ns
t_R	Rise Time (SDA and SCL)	–	1000	ns
t_F	Fall Time (SDA and SCL)	–	300	ns
$t_{SU:STO}$	SETUP Time for "STOP"	4.0	–	μS

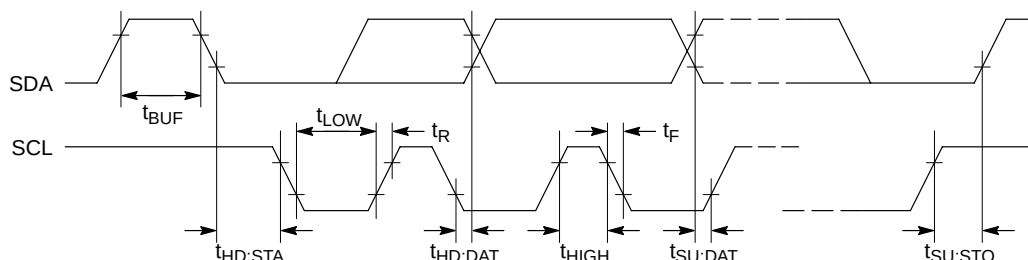

JLC1562B

READ / WRITE MODES

MODE	SDA		I/O Expander
	Master Device	Slave Device	I/O Port
READ	Receiver	Transmitter	Input
WRITE	Transmitter	Receiver	Output

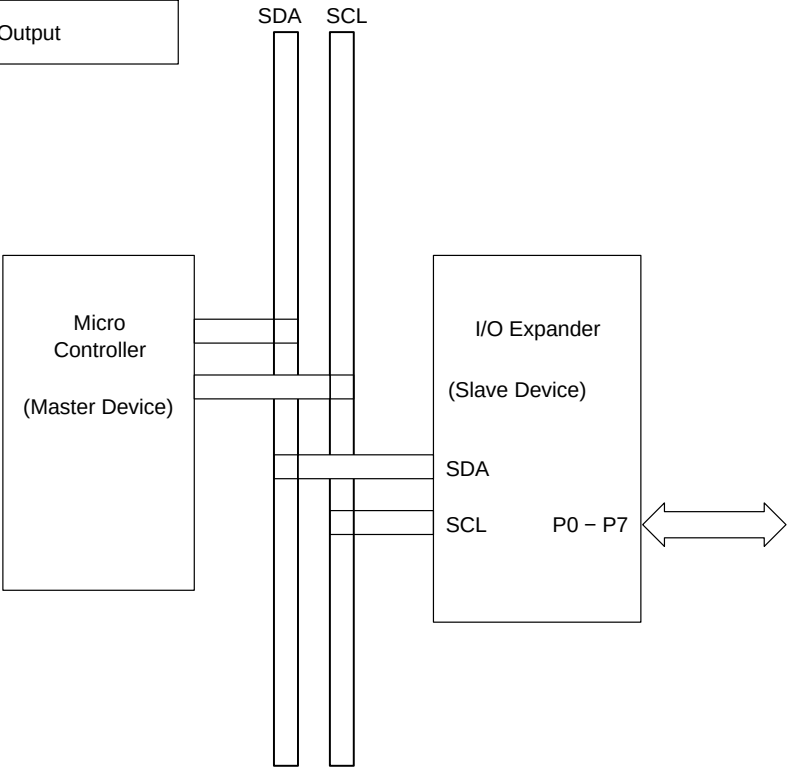

The JLC1562B Supports the following types of Bus Cycles

1.) WRITE MODE (A)

S	Slave Address & R/W	SACK	Write Data (1)	SACK	P
---	---------------------	------	----------------	------	---

2.) WRITE MODE (B)

S	Slave Address & R/W	SACK	Write Data (1)	SACK	Write Data (2)	SACK	P
---	---------------------	------	----------------	------	----------------	------	---

3.) READ MODE (A)

S	Slave Address & R/W	SACK	Read Data	MACK	P
---	---------------------	------	-----------	------	---

4.) READ MODE (B)


S	Slave Address & R/W	SACK	Read Data (1)	MACK	Read Data (2)	MACK	Read Data (3)	MACK	...	P
---	---------------------	------	---------------	------	---------------	------	---------------	------	-----	---

S = START Condition
 SACK = Slave Acknowledgement
 MACK = Master Acknowledgement
 P = STOP Condition

JLC1562B

READ WRITE DATA FORMAT

<<READ MODE>>



Slave Address	A0 – A2	I/O Expander Device Address (Pins A0 – A2)								
	A3 – A6	<table border="1"><tr><td>A6</td><td>A5</td><td>A4</td><td>A3</td></tr></table> is hard wired as <table border="1"><tr><td>0</td><td>1</td><td>1</td><td>1</td></tr></table>	A6	A5	A4	A3	0	1	1	1
	A6	A5	A4	A3						
0	1	1	1							
R/W	1 : READ ADDRESS									
Read Data	D5 – D7	Output of Comparator “A”. ($V_{th} = 1/2 V_{DD}$)								
	D0 – D4	Output of Comparator “B”. ($V_{th} = 1/2 V_{DD}$ OR V_{DAC}) READ LATCH Bit Controls when Data Will Be Latched.								


<<WRITE MODE>>




Slave Address	A0 – A2	I/O Expander Device Address (Pins A0 – A2)								
	A3 – A6	<table border="1"><tr><td>A6</td><td>A5</td><td>A4</td><td>A3</td></tr></table> is hard wired as <table border="1"><tr><td>0</td><td>1</td><td>1</td><td>1</td></tr></table>	A6	A5	A4	A3	0	1	1	1
	A6	A5	A4	A3						
0	1	1	1							
R/W	0 : WRITE ADDRESS									
Write Data (1)	D0 – D7	Device Pins P0 to P7 Output Bits.								
Write Data (2)	D7	READ LATCH CONTROL Latch Control of Signals C0 – C4 in the Device BLOCK DIAGRAM 0 : Data is latched at the ACK after a READ COMMAND. 1 : Data is latched when Comparator “B” switches from 0 to 1. 								

JLC1562B


<<WRITE MODE>>

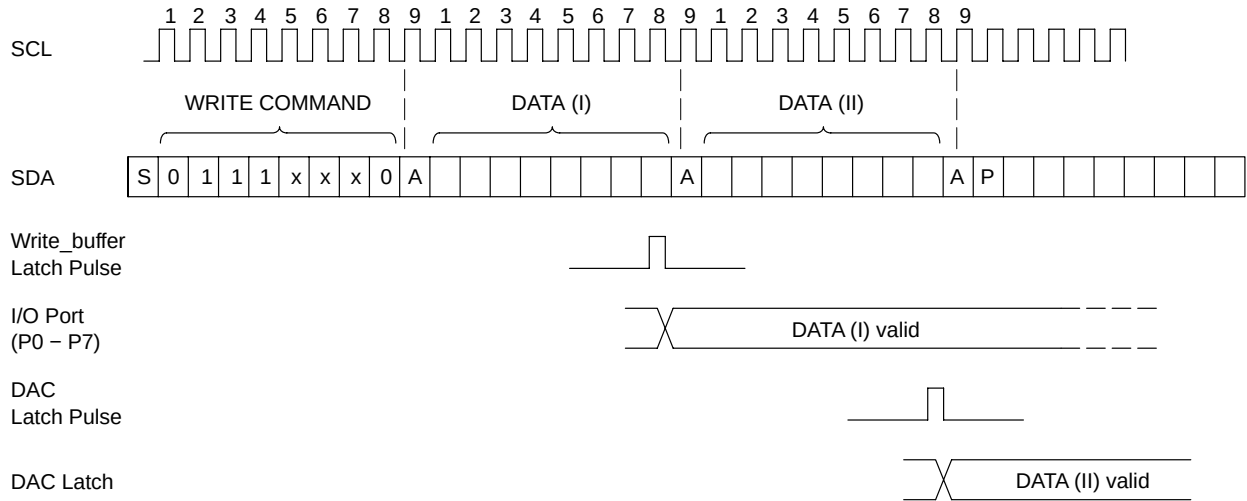

<<READ MODE>> (READ LATCH = 0)

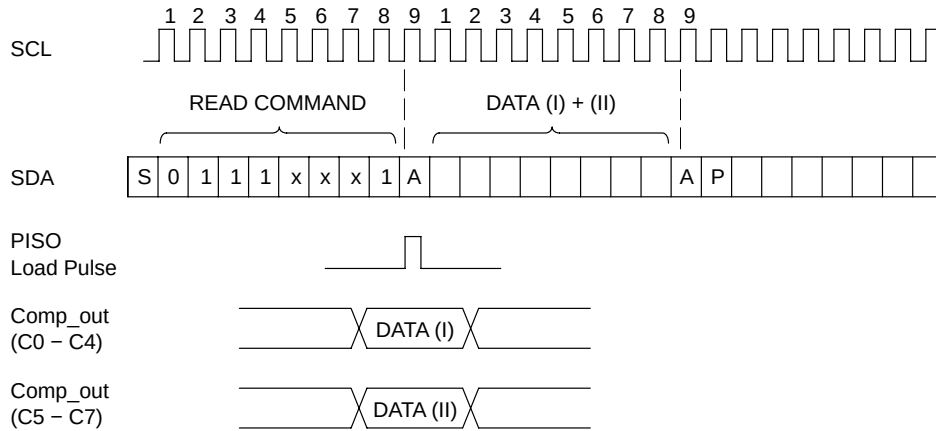


<<READ MODE>> (READ LATCH = 1)

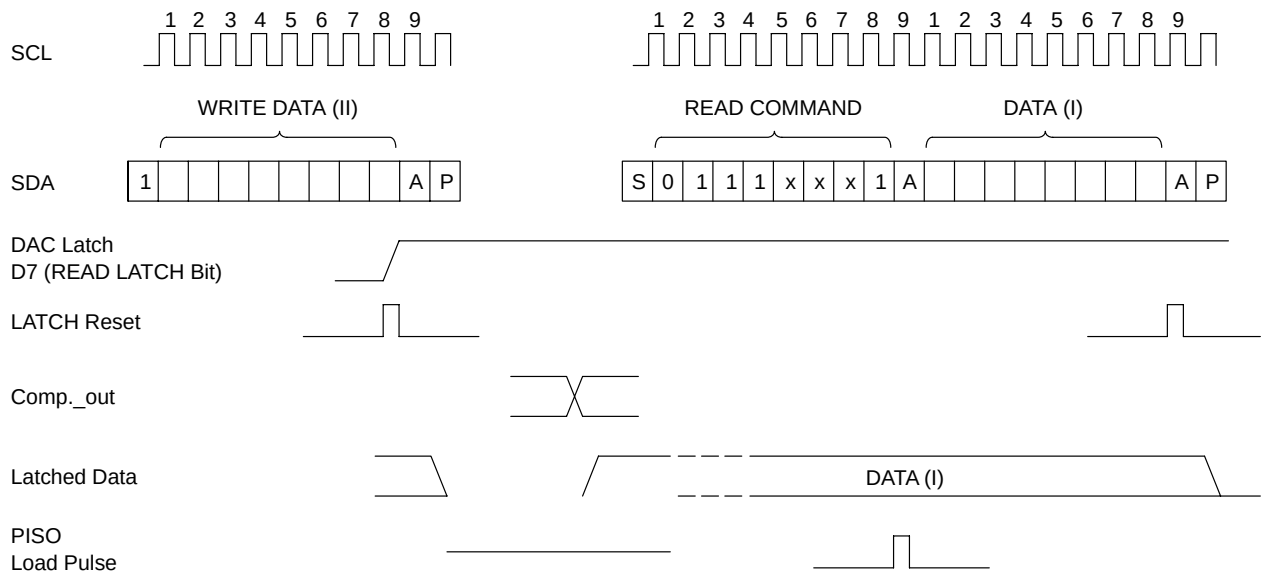

JLC1562B

PACKAGE DIMENSIONS

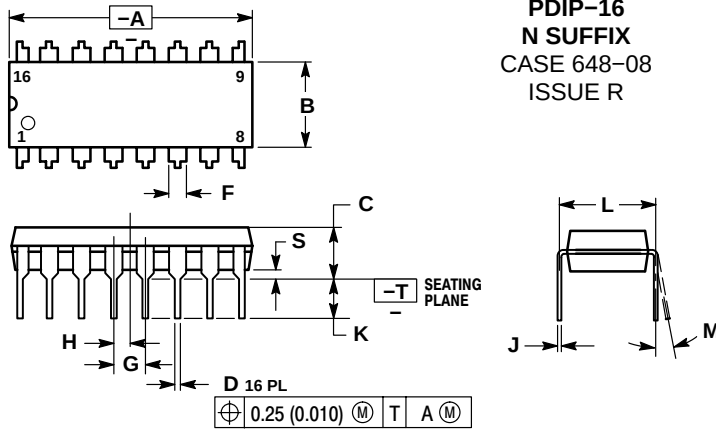

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.740	0.770	18.80	19.55
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.021	0.39	0.53
F	0.040	0.070	1.02	1.77
G	0.100 BSC		2.54 BSC	
H	0.050 BSC		1.27 BSC	
J	0.008	0.015	0.21	0.38
K	0.110	0.130	2.80	3.30
L	0.295	0.305	7.50	7.74
M	0°	10°	0°	10°
S	0.020	0.040	0.51	1.01

EIAJ-16

F SUFFIX

CASE 966-01
ISSUE O

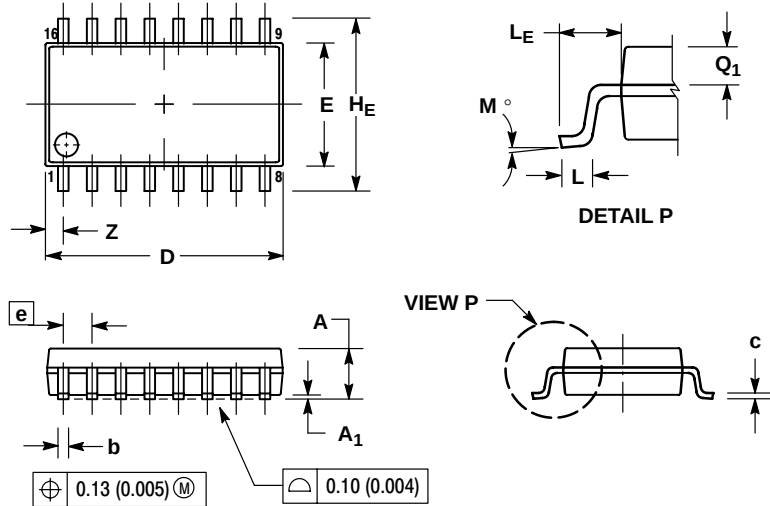

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	---	2.05	---	0.081
A ₁	0.05	0.20	0.002	0.008
b	0.35	0.50	0.014	0.020
c	0.18	0.27	0.007	0.011
D	9.90	10.50	0.390	0.413
E	5.10	5.45	0.201	0.215
e	1.27 BSC		0.050 BSC	
H _E	7.40	8.20	0.291	0.323
L	0.50	0.85	0.020	0.033
L _E	1.10	1.50	0.043	0.059
M	0°	10°	0°	10°
Q ₁	0.70	0.90	0.028	0.035
Z	---	0.78	---	0.031

JLC1562B

PACKAGE DIMENSIONS

QFN-16
CASE 458D-01
ISSUE O

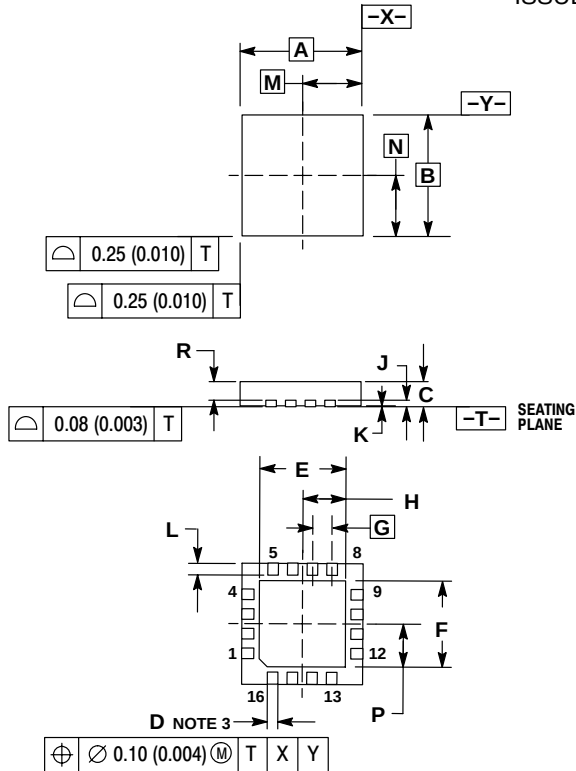

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION D APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.00 BSC		0.157 BSC	
B	4.00 BSC		0.157 BSC	
C	0.80	1.00	0.031	0.039
D	0.23	0.35	0.009	0.014
E	2.75	2.85	0.108	0.112
F	2.75	2.85	0.108	0.112
G	0.65 BSC		0.026 BSC	
H	1.38	1.43	0.054	0.056
J	0.20 REF		0.008 REF	
K	0.00	0.05	0.000	0.002
L	0.35	0.45	0.014	0.018
M	2.00 BSC		0.079 BSC	
N	2.00 BSC		0.079 BSC	
P	1.38	1.43	0.054	0.056
R	0.60	0.80	0.024	0.031

NOTE: The "E" in this Publication Order Number denotes English version.
The Japanese version of this document is available from Japan as JLC1562B/D

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your
local Sales Representative.