

Introduction

The ST-LINK is an in-circuit debugger and programmer for the STM8 and STM32 microcontroller families.

The SWIM / JTAG interface is used to communicate with the STM8 or STM32 microcontroller located on your own application board.

On the PC side, the USB full speed interface is used to communicate with:

- ST Visual Develop (STVD) or ST Visual Program (STVP) software from STMicroelectronics for the STM8,
- IAR and KEIL Integrated Development Environment for the STM32.

Figure 1. ST-LINK



Contents

- 1 Overview 3**
 - 1.1 Features 3
 - 1.2 Product contents 4

- 2 Hardware layout and configuration 5**
 - 2.1 Connection with STM8 applications 5
 - 2.1.1 SWIM flat ribbon 5
 - 2.1.2 SWIM separate-wires cable 7
 - 2.2 Connection with STM32 applications 9

- 3 Software configuration 11**
 - 3.1 For STM8 application development 11
 - 3.2 For STM32 application development and Flash programming 11

- Revision history 12**

1 Overview


1.1 Features

- 5 V power supplied by USB connector.
- USB 2.0 full speed interface compatible.
- USB standard A to Mini-B cable provided.
- SWIM specific features:
 - 1.65 V to 5.5 V application voltage supported on SWIM interface.
 - SWIM low speed and high speed modes supported.
 - SWIM programming speed rate:
9.7 Kbytes/s in low speed,
12.8 Kbytes/s in high speed.
 - SWIM cable provided for connection to an application with an ERNI standard connector vertical (ref: 284697 or 214017) or horizontal (ref: 214012).
 - SWIM cable for connection to an application with pin headers or 2.54 mm pitch connector.
- JTAG specific features:
 - 3 V to 3.6 V application voltage supported on JTAG interface and 5 V tolerant inputs.
 - JTAG cable provided for connection to a standard JTAG 20-pin pitch 2.54 mm connector.
- Direct firmware update feature supported (DFU).
- Status LED which blinks during communication with PC.
- Operating temperature 0 to 50°C.

1.2 Product contents

Figure 2 details the ST-LINK and the various cables delivered with the product.

Figure 2. ST-LINK product contents

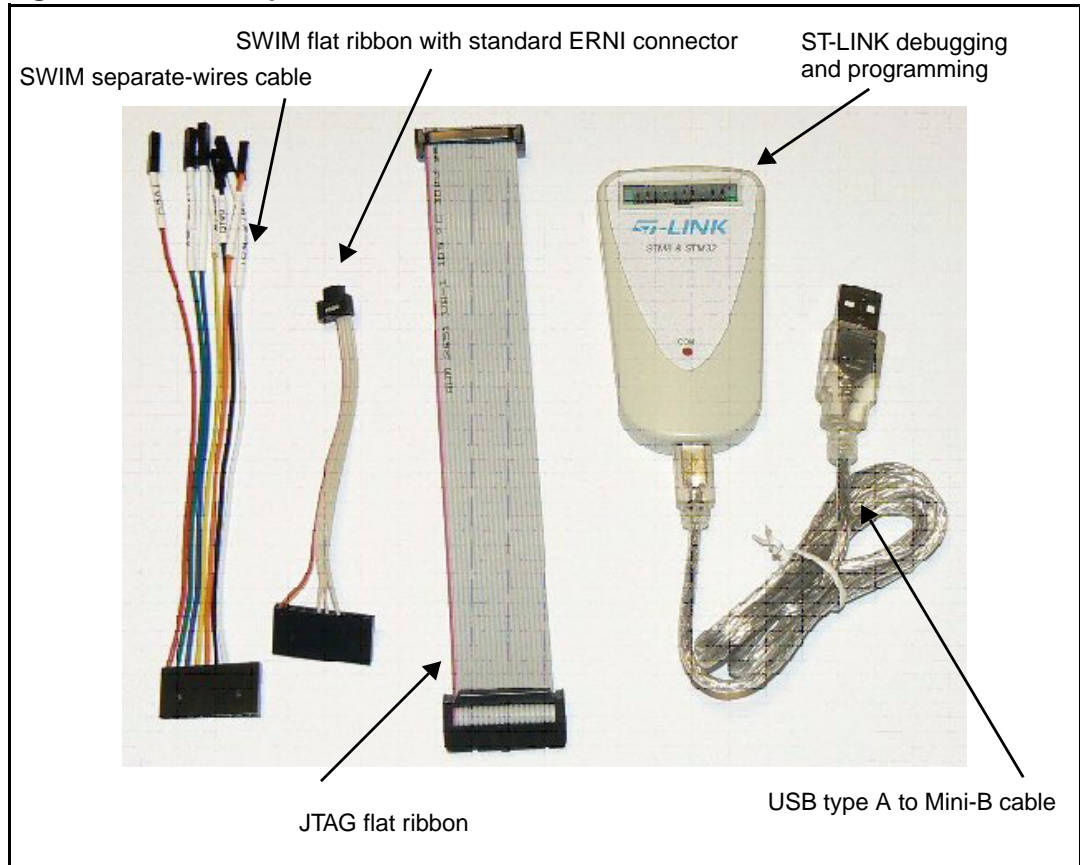

2 Hardware layout and configuration

The ST-LINK is designed around the STM32F103C8 (ARM Cortex M3 controller in a TQFP48 package). As illustrated in [Figure 3](#) the same connector is used for a SWIM or JTAG interface according to the cable connected to it.

Figure 3. ST-LINK layout



2.1 Connection with STM8 applications

For STM8 developments the ST-LINK can be connected to the target board by two different cables depending on the connector available on your application board.

2.1.1 SWIM flat ribbon

[Figure 4](#) shows you how to connect the ST-LINK if a standard 4-pin SWIM connector is present on your application board. The references of the connectors manufactured by ERNI which must be used on your application board are 284697, 214017 (vertical) or 214012 (horizontal).

[Figure 5](#) shows pin 16 is missing on the ST-LINK target connector. This missing pin is used as a safety key on the cable connector to guarantee connection of the SWIM cable in the correct position on the target connector even pins, used for both SWIM and JTAG cables.

[Figure 6](#) shows a SWIM debugging connector layout on flat ribbon.

Figure 4. ST-LINK connection to target using a standard SWIM connector

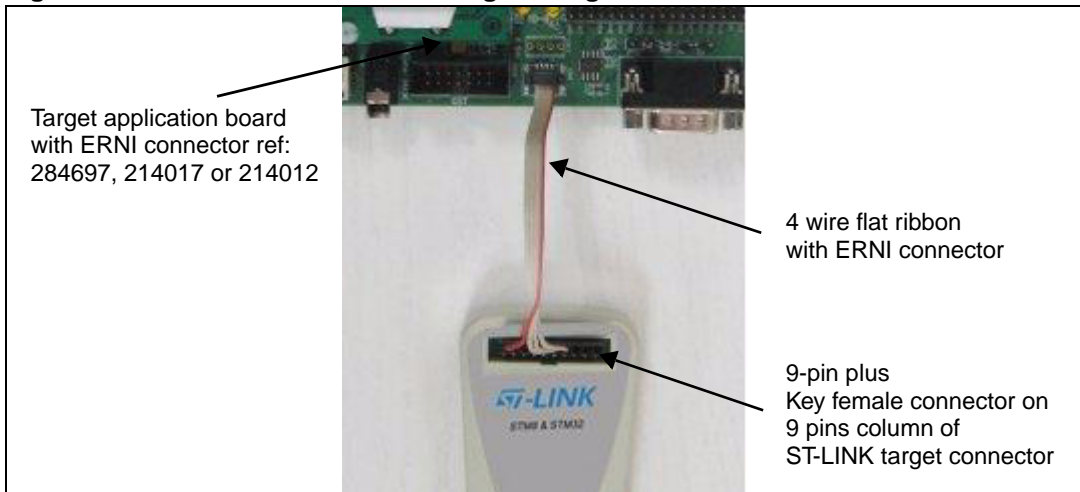


Figure 5. Key detail on connectors


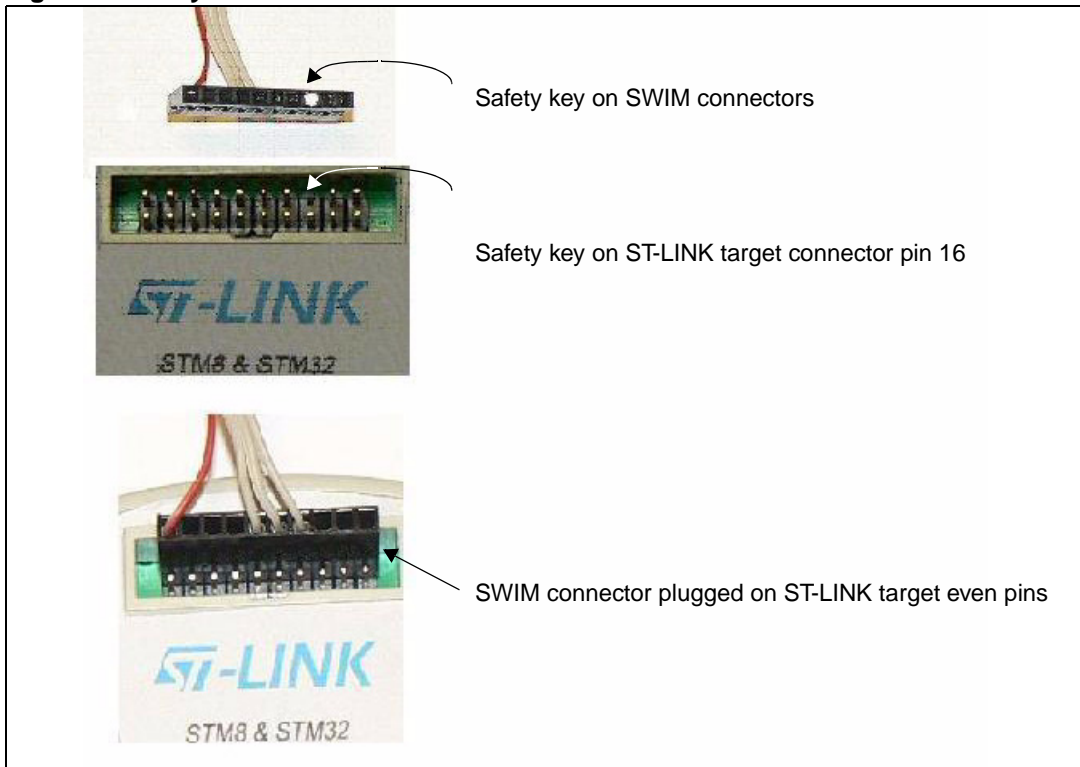


Table 1. SWIM flat ribbon connections

Pin N°	Name	Function	Target connection
1	TVCC	Target VCC	MCU VCC
2	SWIM	SWIM	MCU SWIM pin
3	GND	GROUND	GND
4	SWIM-RST	RESET	MCU RESET pin

Figure 6. SWIM debugging connector layout on flat ribbon

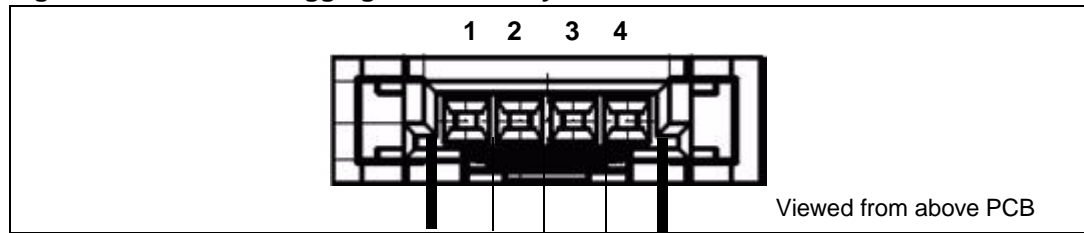

2.1.2 SWIM separate-wires cable

As the SWIM separate-wires cable has independent connectors for all pins on one side, it is possible to connect the ST-LINK to an application board without a standard SWIM connector. On this flat ribbon all signals are referenced by a specific color and a label to ease the connection on target.

[Table 2](#) summarizes the signals present on this cable and their connection on the target board.

Table 2. SWIM separate-wires cable connections

Color	Cable pin name	Function	Target connection
Red	TVCC	Target VCC	MCU VCC
Green	UART-RX	Unused	Reserved (not connected on target)
Blue	UART-TX		
Yellow	BOOT0		
Orange	SWIM	SWIM	MCU SWIM pin
Black	GND	GROUND	GND
White	SWIM-RST	RESET	MCU RESET pin

TVCC, SWIM, GND and SWIM-RST can be connected to a low cost 2.54 mm pitch connector or to pin headers available on the target board.

BOOT0, UART-TX and UART-RX are reserved for future developments.

[Figure 7](#) shows an example of connection to a 2.54 mm pitch connector on target. It shows how pin 16 is missing on the ST-LINK target connector. This missing pin is used as a safety key on the cable connector to guarantee connection of the SWIM cable in the right position on the target connector used for both SWIM and JTAG cables (even pins of the target connector).

Figure 7. SWIM separate-wires cable connector layout


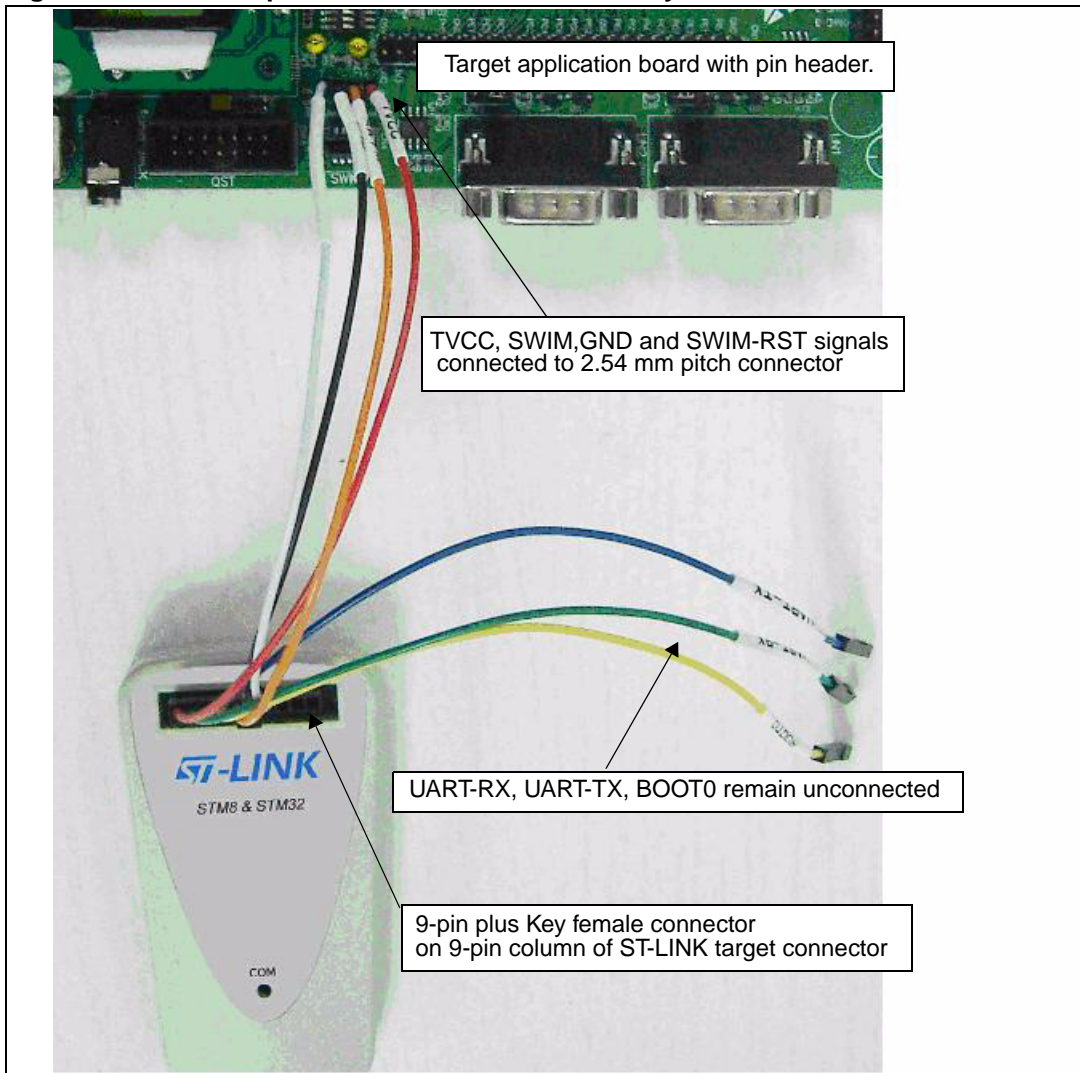


Figure 8. SWIM cable connection detail

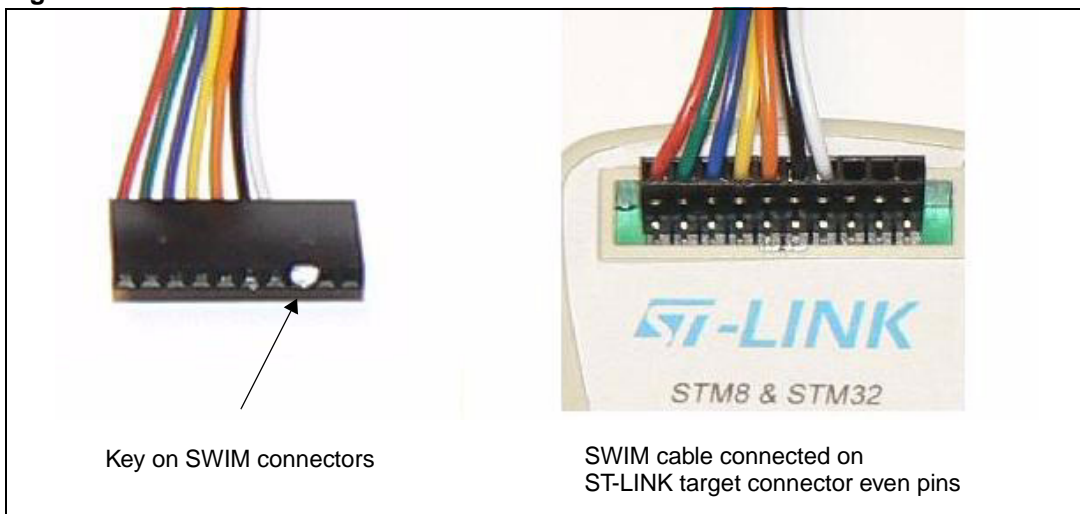

2.2 Connection with STM32 applications

For STM32 developments the ST-LINK must be connected to the application using the standard 20-pin female-female JTAG flat ribbon provided.

[Table 3](#) below summarizes signals names, functions and target connection signals of this cable.

Table 3. JTAG cable connections


Pin N°	Name	ST-LINK function	Target connection
1	TVCC	Target VCC	MCU VCC
2			
3	TRST	GROUND	GND
4	UART-RX	Unused	GND or not connected
5	TDI	JTAG TDI	TDO
6	UART-TX	Unused	GND or not connected
7	TMS	JTAG TMS	TMS
8	BOOT0	Unused	GND or not connected
9	TCK	JTAG TCK	TCK
10	SWIM	Unused	GND or not connected
11	NC	not connected	not connected
12	GND	GROUND	GND
13	TDO	JTAG TDO	TDI
14	SWIM-RST	Unused	GND
15	RESET	RESET	RESET (optional)
16	KEY	not existing pin	not connected
17	NC	not connected	not connected
18	GND	GROUND	GND
19	VDD	VDD (3.3V)	not connected
20	GND	GROUND	GND

Observe that pin 16 is not present on the ST-LINK target connector in order to ensure connection of SWIM cables on even columns of this connector only.

Figure 9. JTAG debugging flat ribbon layout



Figure 10. Debugging connector layout on ST-LINK and flat cable

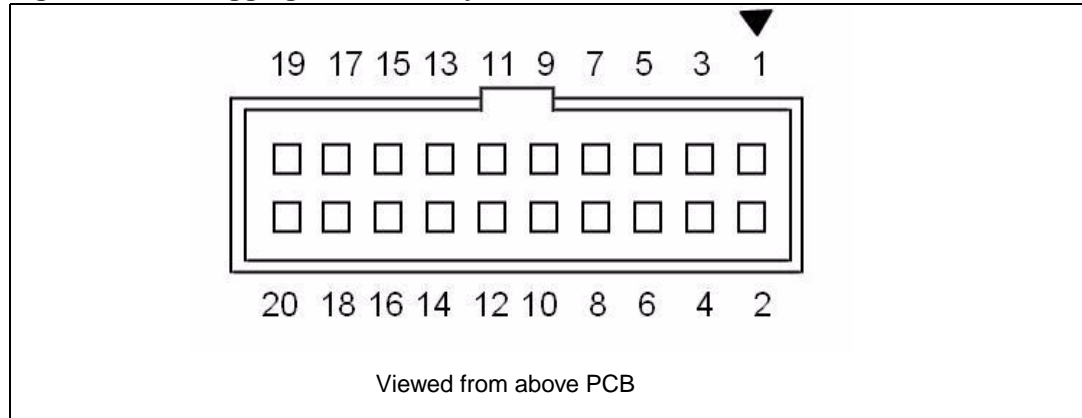

The pinout of the target male connector is given in [Table 3](#).

3 Software configuration

3.1 For STM8 application development

Please refer to:

- ST Visual Develop (STVD) tool chain
(ST web URL: <http://www.st.com/mcu/contentid-44-15-STVD.html>).
- ST Visual Programmer (STVP) for programming STM8 Flash microcontrollers
(ST web URL: <http://www.st.com/mcu/contentid-47-15-STVP.html>).

The ST-LINK is listed in the ST toolchain and programmer environment as a target from STVD 4.1.0 and STVP 3.1.0.

3.2 For STM32 application development and Flash programming

Please refer to IAR and KEIL documentation and web sites.

ST-LINK is listed in IAR and KEIL integrated development environment as a debugging target from IAR EWARM 5.30 and Keil ARM MDK 3.30.

Revision history

Table 4. Document revision history

Date	Revision	Changes
12-Jan-2009	1	Initial release.
19-Jan-2009	2	Incorrect Rev number on cover page. No other modifications.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com