


Small Signal Switching Diodes, High Voltage



LINKS TO ADDITIONAL RESOURCES



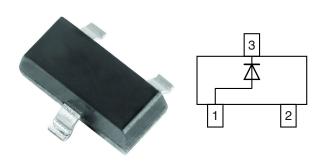







FEATURES

- Silicon epitaxial planar diode
- Fast switching diode in case SOT-23, especially suited for automatic insertion
- AEC-Q101 qualified available
- Base P/N-E3 RoHS-compliant, commercial grade
- Base P/N-HE3_A RoHS-compliant, AEC-Q101 qualified
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912







ROHS

MECHANICAL DATA

Case: SOT-23

Weight: approx. 9.2 mg
Packaging codes / options:

18/10K per 13" reel (8 mm tape), 10K/box 08/3K per 7" reel (8 mm tape), 15K/box

PARTS TABLE							
PART	TYPE DIFFERENTIATION	ORDERING CODE	AEC-Q101 QUALIFIED	TYPE MARKING	CIRCUIT CONFIGURATION	TAPED UNITS PER REEL	MINIMUM ORDER QUANTITY
		BAS19-E3-08	no		Single	3 000	15 000
BAS19	V _R = 100 V	BAS19-HE3_A-08	yes	A8G		(8 mm tape on 7" reel)	15 000
	v _R = 100 v	BAS19-E3-18	no	AoG		10 000	10 000
		BAS19-HE3_A-18	yes			(8 mm tape on 13" reel)	10 000
		BAS20-E3-08	no	es A9G	Single	3 000	15,000
BAS20	V _R = 150 V	BAS20-HE3_A-08	yes			(8 mm tape on 7" reel)	15 000
	v _R = 150 v	BAS20-E3-18	no		Sirigle	10 000	10 000
		BAS20-HE3_A-18	yes			(8 mm tape on 13" reel)	10 000
		BAS21-E3-08	no	440		3 000	15 000
BAS21	V _R = 200 V	BAS21-HE3_A-08	yes		Single	(8 mm tape on 7" reel)	13 000
	v _R = 200 v	BAS21-E3-18 no AAG Single 10	10 000	10.000			
		BAS21-HE3_A-18	yes			(8 mm tape on 13" reel)	10 000

PACKAGE						
PACKAGE NAME WEIGHT		MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS		
SOT-23	9.2 mg	UL 94 V-0	MSL 1 (according J-STD-020)	Peak temperature max. 260 °C		



ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	PART	SYMBOL	VALUE	UNIT	
		BAS19	V _R	100	V	
Continuous reverse voltage		BAS20	V _R	150	V	
		BAS21	V_R	200	V	
		BAS19	V_{RRM}	120	V	
Repetitive peak reverse voltage		BAS20	V_{RRM}	200	V	
		BAS21	V_{RRM}	250	V	
Non repetitive peak forward current ⁽¹⁾	t = 1 μs		I _{FSM}	2.5	А	
Non repetitive peak forward surge current ⁽¹⁾	t = 1 s		I _{FSM}	0.5	А	
Maximum average forward rectified current ⁽¹⁾	f ≥ 50 Hz		I _{F(AV)}	250	mA	
DC forward current (1)			I _F	350	mA	
Repetitive peak forward current			I _{FRM}	625	mA	
Power dissipation	On FR-4 board with recommended soldering footprint		P _{tot}	300	mW	
	Infinite heatsink]		500	mW	

Note

(1) Infinite heatsink

THERMAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT		
Thermal resistance junction to ambient air	according to JEDEC® 51-3 on FR-4 board with recommended soldering footprint	R _{thJA}	420	K/W		
Thermal resistance junction to lead	Infinite heatsink	R _{thJL}	250	K/W		
Junction temperature		T _j	150	°C		
Storage temperature range		T _{stg}	-65 to +150	°C		
Operating temperature range		T _{op}	-55 to +150	°C		

ELECTRICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified)							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Forward voltage	I _F = 100 mA		V _F			1.0	V
Forward voitage	I _F = 200 mA		V _F			1.25	V
	V _R = 100 V	BAS19	I _R			100	nA
Leakage current	V _R = 150 V	BAS20	I _R			100	nA
Leakage current	V _R = 200 V	BAS21	I _R			100	nA
	$V_R = V_{Rmax.}, T_j = 150 ^{\circ}C$		I _R			100	μA
Dynamic forward resistance	I _F = 10 mA		r _f		5		Ω
Diode capacitance	V _R = 0, f = 1 MHz		C _D			5	pF
Reverse recovery time	$I_F = I_R = 30 \text{ mA}, R_L = 100 \Omega,$ $i_R = 3 \text{ mA}$		t _{rr}			50	ns



TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)

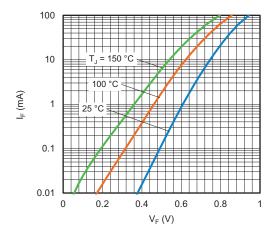


Fig. 1 - Typical Forward Current vs. Forward Voltage

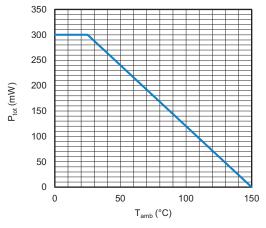


Fig. 2 - Admissible Power Dissipation vs. Ambient Temperature

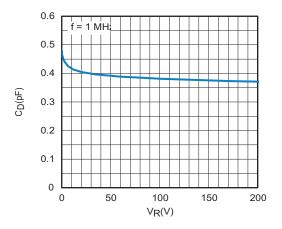


Fig. 3 - Typical Capacitance vs. Reverse Voltage



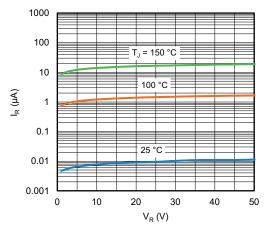



Fig. 4 - Typical Reverse Leakage Current vs. Reverse Voltage




PACKAGE DIMENSIONS in millimeters: **SOT-23**

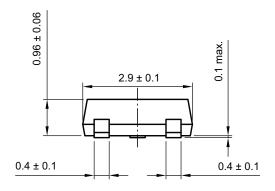

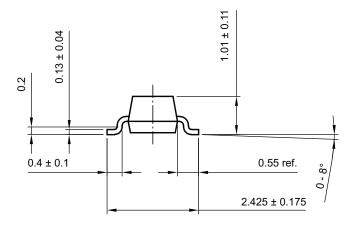

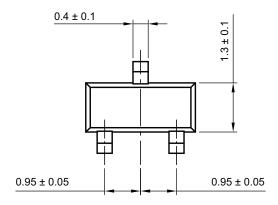

footprint recommendation:




Created - Date: 18-Oct-2021 Rev. 01 - Date: 18-Jan-2022 S8-V-3929.01-009 (4)



CARRIER TAPE SOT-23


A-A Section 0.229 ± 0.013 0.229 ± 0.013 0.229 ± 0.013 0.22 ± 0.01 A+0.1 A+0.1 A+0.1

B-B Section



Created Date: 04-Feb-2010 Rev. Date: 07-Feb-2022 S8-V-3929.01-005 (4)

ORIENTATION IN CARRIER TAPE SOT-23

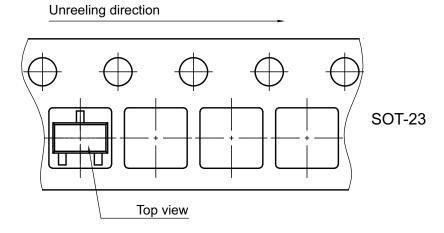

Created Date: 04-Feb-2010 Rev. Date: 07-Nov-2022 S8-V-3929.01-005 (4)



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.